




New Black Opal™ Mini-Cell^ Chillcel® Pad Technology

Our revolutionary Black Opal™ Mini-Cell^ Chillcel® pads have transformed the aesthetics of our coolers as they seamlessly blend into their surroundings.

- Revolutionary Mini-cell structure with 4mm flute means improved cooling capacity of 8-13%*
- New pad formulation has 25% more surface area, dramatically improving cooling efficiency*
- Only the best quality paper is used, which gives the pads optimal saturation efficiencies to suit the harshest climates
- Pads are specifically designed for Seeley International coolers and all identified by the Genuine Seeley Parts label.

*As compared with previous Seeley International chillcel technology. Tested in the NATA (National Association of Testing Authorities) accredited laboratory.

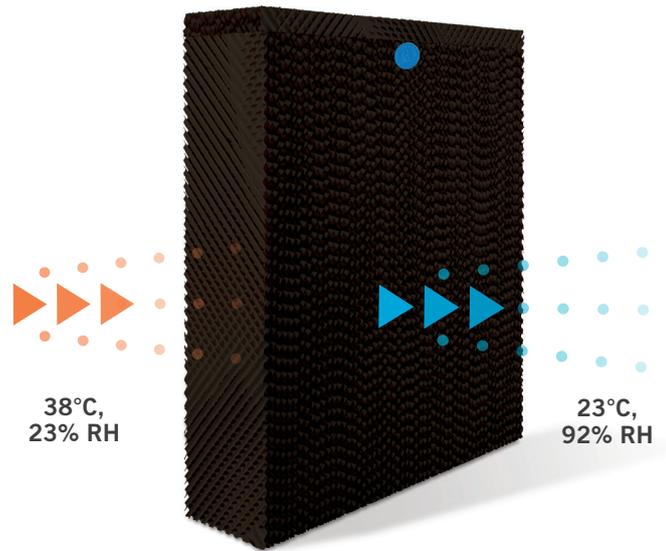

The principles of evaporative cooling

Evaporative cooling is where evaporation is used to cool the air. As water is evaporated, energy is absorbed from the air, reducing the temperature. Two temperatures are important when dealing with evaporative cooling systems, the outside ambient air temperature and the cooled supply air.

The key to effective evaporative cooling is ensuring that each of the cooling pads are completely saturated at all times during operation. For this reason only the best cellulose material (paper) and thermoset resin is used to make Seeley International Mini-cell Chillcel pads.

$$\Delta T = \%SE \times (db - wb)$$

ΔT = temperature reduction

%SE = Saturation Efficiency of Mini-cell Chillcel


db = Dry Bulb

wb = Wet Bulb

RH = Relative Humidity

db (°C)	wb (°C)	% RH	% SE	ΔT (°C)	Supply Temp °C
35	22	31	91.5%	11.9	23.1°C
35	24	40	91.5%	10.1	24.9°C
35	26	49	91.5%	8.2	26.8°C
35	28	59	91.5%	6.4	28.6°C

^Patent pending


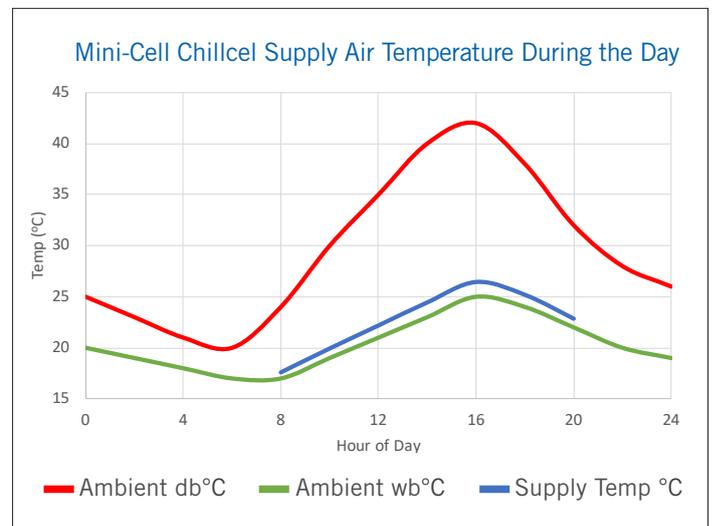


Mini-Cell[^] Chillcel[®] Pad Technology

Dramatic improvement in cooling efficiency



Genuine Seeley Part identification label.

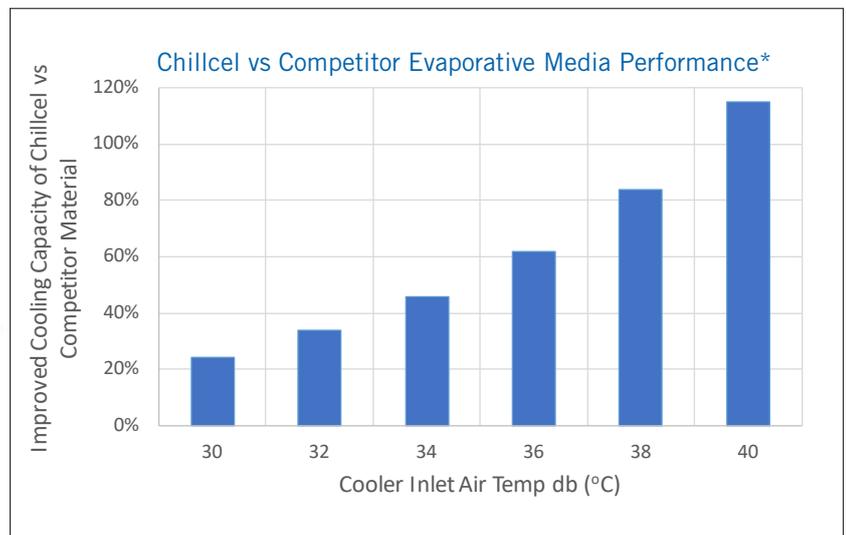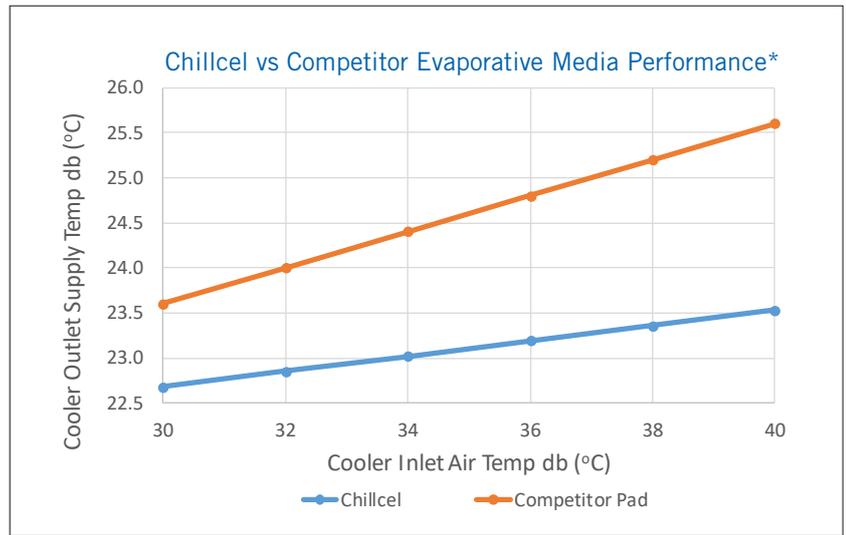

*Tested in a NATA (National Association of Testing Authorities) accredited laboratory. Cooling capacity calculation based on AS2913, Breezair TBS1580 Cooler and inlet air temperature wb 22°C. Competitor evaporative media saturation efficiency assumed to be 80%.

COOLAIR MODEL	PAD PART NUMBER	PAD DIMENSIONS (mm)	PAD AREA (m ²)
CPL 1100X	114606 EMEA	850(w) x 526(h) x 90(d)	1.79
CPQ 1100X	(4-pack)		



eurosales@seeleyinternational.com
uksales@seeleyinternational.com

www.seeleyinternational.com



Seeley International France
 320 Avenue Berthelot
 69371 Lyon Cedex 08
 France
 Phone: +33 (0) 472 7847 80

Seeley International Italy
 Loc. Policiano 72/M
 52100 Arezzo Italy
 Phone: +39 (0) 575 97189

Seeley International UK
 Unit 11 Byron Business Centre,
 Duke Street
 Hucknall Nottingham
 NG15 7HP United Kingdom
 Phone: +44 (0) 115 9635630

