

SUBMITTAL DATA SHEET – CW-80 WITH MULTI-MAGIC CONTROLS

Job Name:

Order No.:

Project Manager:

Submitted To:

Date:

Special
Instructions:

Location:

Contractor:

Engineer:

Submitted By:

Asset ID:

| MODEL | QUANTITY |
|---------------------------------------|---------------|
| CW-80 IEC Standard Fans | |
| CW-80 Supercool Standard Fans | |
| CW-80 IEC High-Capacity Fans | |
| CW-80 Supercool High-Capacity Fans | |
| COOLING APPLICATION | |
| Standalone | Pre-Cooling |
| | Supplementary |
| DESIGN CONDITIONS | |
| <u>Outdoor Ambient Conditions:</u> | |
| Dry Bulb | °F |
| Wet Bulb | °F |
| Elevation Above Sea Level | ft |
| <u>Fan Duty Point:</u> | |
| Supply Air Volume | cfm |
| External Static Pressure | in.wg |
| <u>Performance:</u> | |
| Supply Air Temperature | °F |
| Cooling Capacity | BTU/hr |
| OPTIONAL ACCESSORIES | |
| MERV13 Air Filters | QUANTITY |
| Multi-Magic Wall Controller | |
| Room Temperature & Humidity Sensor | |
| Ambient Temperature & Humidity Sensor | |
| Duct Temperature & Humidity Sensor | |
| Differential Pressure Sensor | |

| STANDARD FEATURES |
|---|
| <input checked="" type="checkbox"/> Indirect Evaporative Cooling |
| <input checked="" type="checkbox"/> Patented high technology CW Indirect Cooling cores. |
| <input checked="" type="checkbox"/> Fresh, outside air for better indoor air quality (IAQ). |
| <input checked="" type="checkbox"/> No refrigerants or ozone depleting chemicals. |
| <input checked="" type="checkbox"/> Quiet and vibration free operation. |
| <input checked="" type="checkbox"/> Filtered air with reduced dust, pollens and allergens |
| <input checked="" type="checkbox"/> High EER (Energy Efficiency Ratio). |
| <input checked="" type="checkbox"/> Horizontal side discharge for conditioned air. |
| <input checked="" type="checkbox"/> Top discharge for exhaust air. |
| <input checked="" type="checkbox"/> Low maintenance, simple winterization |
| <input checked="" type="checkbox"/> Integrated PLC for internal control |
| <input checked="" type="checkbox"/> Integrated water management system. |
| <input checked="" type="checkbox"/> Removable panels for easy maintenance access. |
| <input checked="" type="checkbox"/> Easy to connect power/control wiring. |
| <input checked="" type="checkbox"/> BMS/BAS control terminals |
| <input checked="" type="checkbox"/> Modbus RS-485 control terminals |
| <input checked="" type="checkbox"/> 2x Backward-curved centrifugal supply fans |
| <input checked="" type="checkbox"/> 4x Backward-curved centrifugal exhaust fans |
| <input checked="" type="checkbox"/> Direct coupled EC fan motors. |
| <input checked="" type="checkbox"/> Molded plastic (ASA) water tank. |
| <input checked="" type="checkbox"/> Base frame manufactured with galvanized steel. |
| <input checked="" type="checkbox"/> Cabinet manufactured from 304 stainless steel. |
| <input checked="" type="checkbox"/> Built-in forklift tyne openings for lifting the cooler. |
| <input checked="" type="checkbox"/> 1-year limited warranty. |
| <input checked="" type="checkbox"/> ETL Listed to UL Standard 507 |

SUBMITTAL DATA SHEET – CW-80 WITH MULTI-MAGIC CONTROLS

GENERAL

Climate Wizard coolers are characterized by the supply of 100% fresh, cool, outside air with NO additional moisture added, with greatly reduced energy consumption relative to an equivalent refrigerated system performing the same duty.

The cooler comprises of two supply air fans, four exhaust air fans, an indirect heat exchanger pack, integrated water reservoir, pump, and water management system.

CW-80S can be operated in “Supercool” mode producing even colder supply air with added moisture (direct cooling). Supercool coolers have an additional pump and Chillcel® pads.

CABINET

The cabinet is constructed from 304 stainless steel incorporating the motor / fan assemblies, non-corrodible heat exchange cores and other ancillary equipment all supported by a heavy gauge galvanized base frame for structural stability.

Forklift tine channels are provided within the base frame to facilitate transport and lifting.

Components are effectively treated to ensure corrosion resistance and mechanical fasteners are zinc coated, stainless steel or aluminum.

Connection interface surfaces are provided for the outlet supply air ductwork to be fitted using established industry practices.

FANS & MOTORS

The fans are a multi-blade, centrifugal type with backward curved blades. They have a cast aluminum coated rotor and aluminum impellers which are individually statically and dynamically balanced. The fans are directly mounted to the electric motors.

The electric motors are high efficiency, inverter driven and responsive to 0-10V control signals to implement speed control that delivers optimum efficiency at lower speed operation.

Standard and high capacity fans available.

HEAT EXCHANGE CORE

The heat exchange cores are designed to facilitate heat exchange between the wet air passages and the dry air passages such that high efficiency heat transfer takes place without any additional moisture.

They are designed to provide long life and consistent, long term high efficiency.

Supercool models are fitted with additional Chillcel® fabricated, honeycomb direct cooling pads.

WATER MANAGEMENT SYSTEM

The water supply connection is a ¾” fitting that connects directly to the internally mounted solenoid valve.

Water is held in an internal reservoir manufactured from molded polymer to ensure durability and corrosion resistance.

Heat exchange core saturation is achieved through internally mounted pumps delivering water to a specially designed non-clog water distribution system guaranteeing continuous uniform flow.

The wet components of each pump are manufactured from stainless steel and the pumps are driven by a 3-phase industrial, fully enclosed fan cooled electric motor with thermal overload protection. Easily cleanable in line strainers are provided for both the incoming water supply and the water distribution system.

An electronic water management system controls the maximum salinity level and chlorination of the reservoir water through continuous monitoring and replenishment.


The reservoir is drained by an electric drain valve that responds to the water management control system. The design of the reservoir ensures that no water remains after draining.

AIR FILTERS

Intake air is filtered through aluminum framed, washable pleated filters protected by intake louvers to minimize intrusion of rain.


APPROVALS

CW-80 coolers are ETL Listed to UL Standard 507

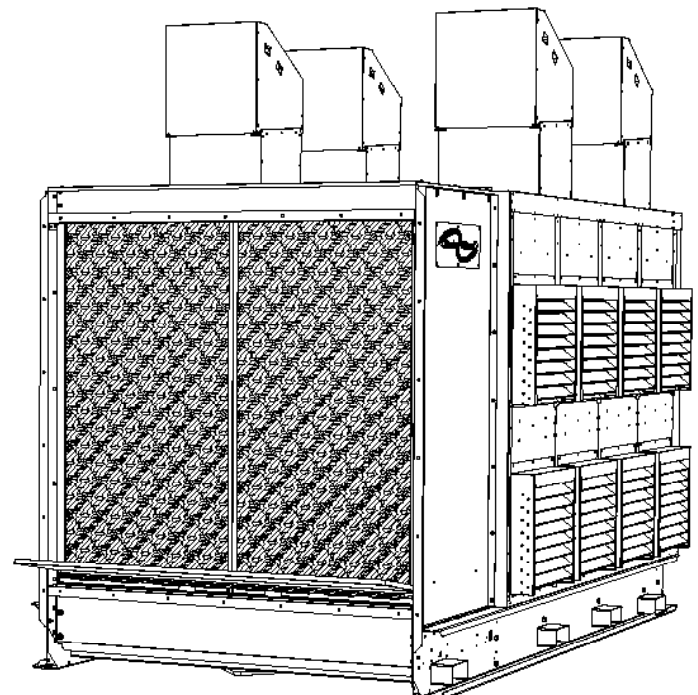


SUBMITTAL DATA SHEET – CW-80 WITH MULTI-MAGIC CONTROLS


TOP

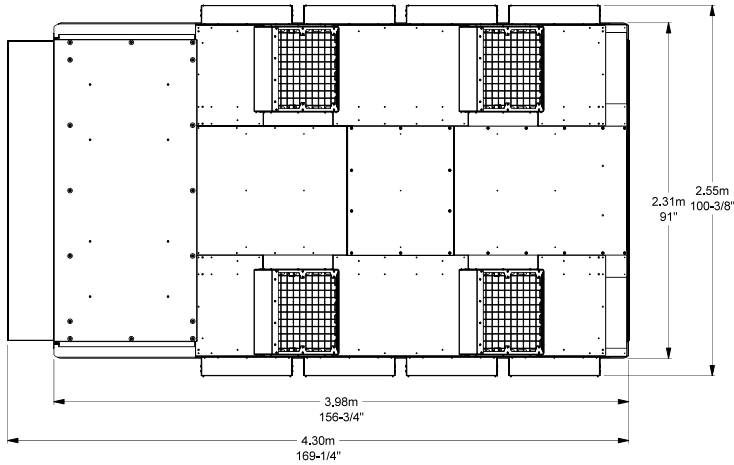



BACK

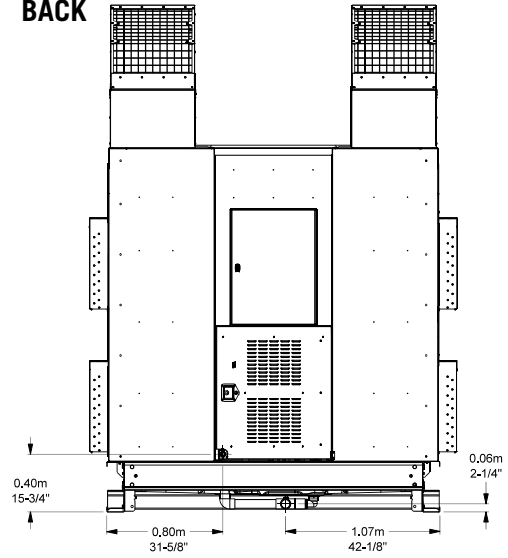

SIDE

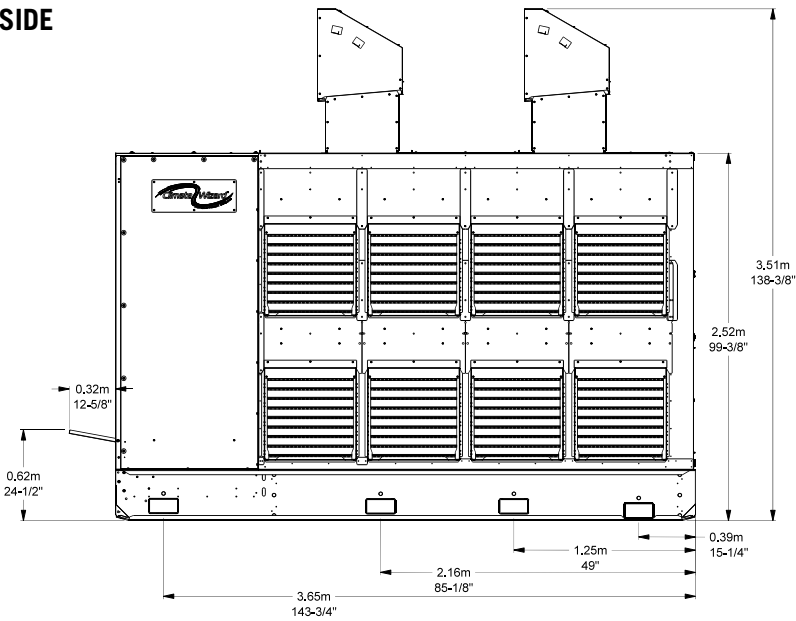

FRONT

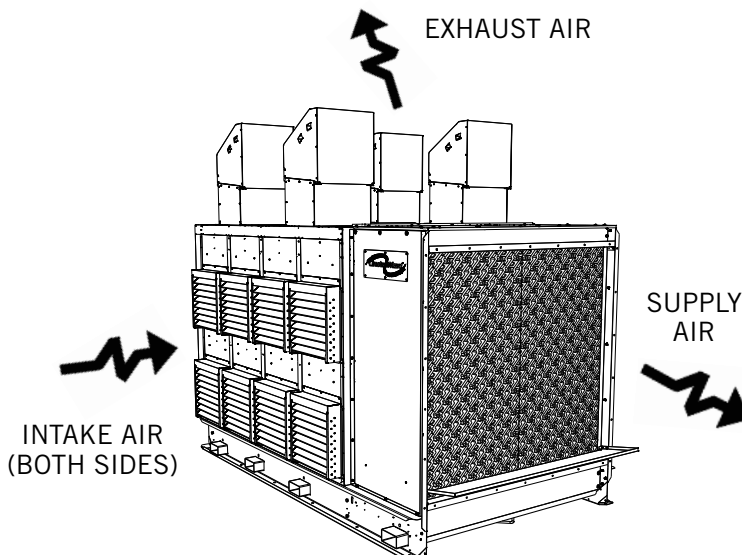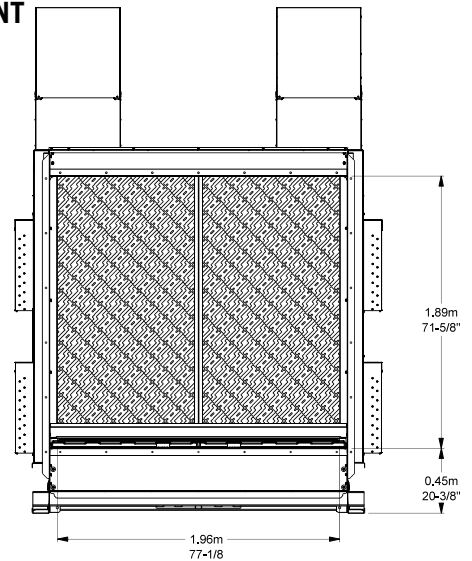


NOTE: Installers must allow adequate access to and around the cooler for Maintenance.

Provision must be made for access to power, control, water supplies and drains.


Refer to the Installation Manual for full details.

SUBMITTAL DATA SHEET – CW-80 WITH MULTI-MAGIC CONTROLS

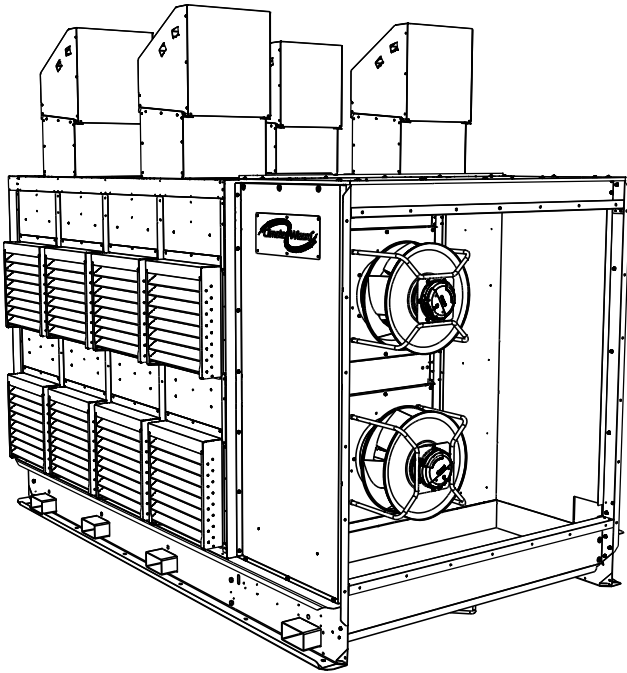

CW-80 IEC STANDARD CAPACITY FANS

- Primary Indirect Evaporative Cooling Stage
- No added Moisture

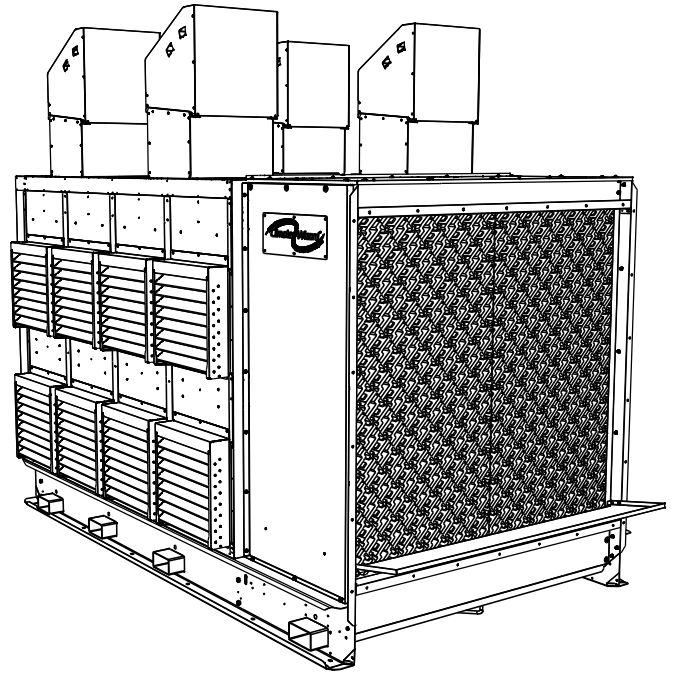


CW-80 SUPERCOOL STANDARD CAPACITY FANS

- Primary Indirect Evaporative Cooling Stage
- Secondary Direct Evaporative Cooling Stage
- Highest Energy Efficiency



CW-80 IEC HIGH CAPACITY FANS

- Primary Indirect Evaporative Cooling Stage
- No added Moisture
- Highest External Static Pressure Capacity



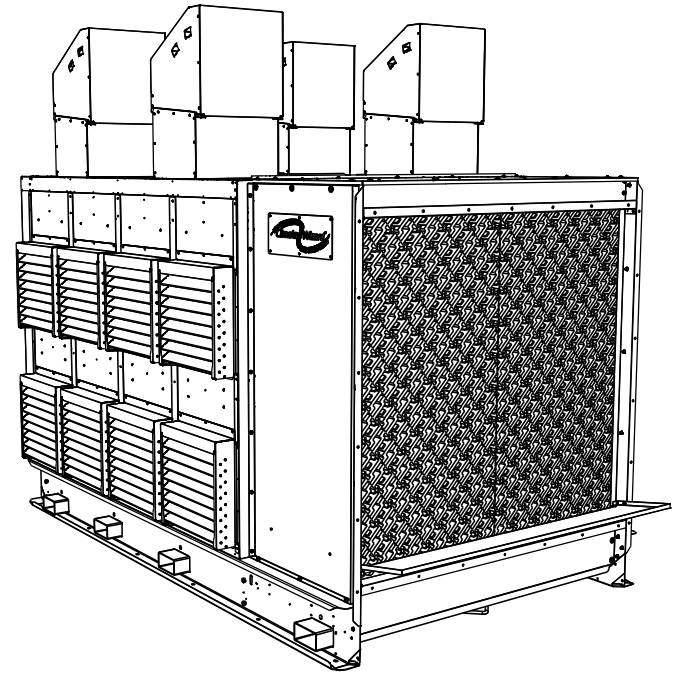


CW-80 SUPERCOOL HIGH CAPACITY FANS

- Primary Indirect Evaporative Cooling Stage
- Secondary Direct Evaporative Cooling Stage
- Highest Cooling Capacity

SUBMITTAL DATA SHEET – CW-80 WITH MULTI-MAGIC CONTROLS

CW-80 IEC Standard Capacity
 CW-80 IEC High Capacity
 CW-80 SUPERCOOL Standard Capacity
 CW-80 SUPERCOOL High Capacity

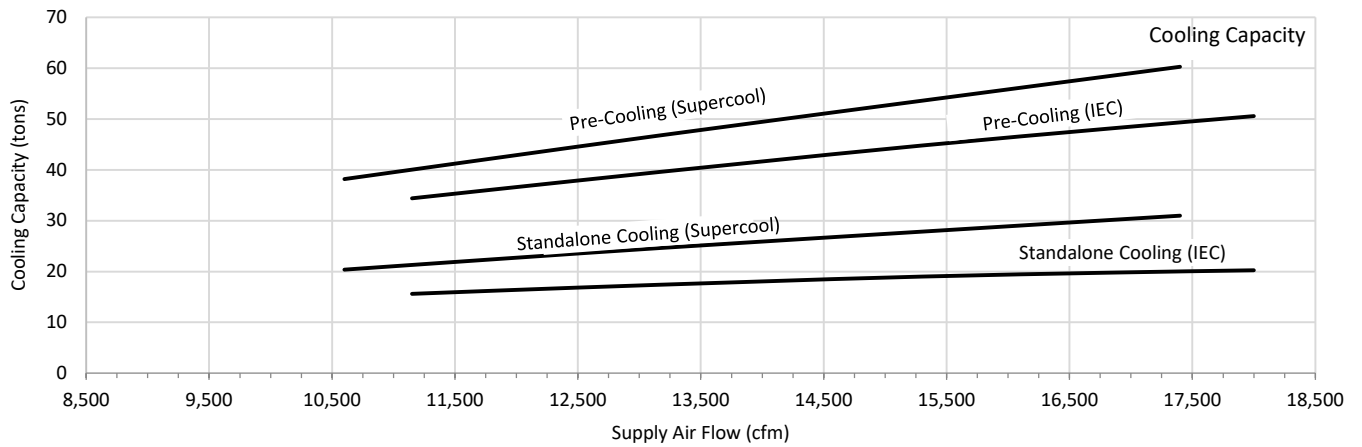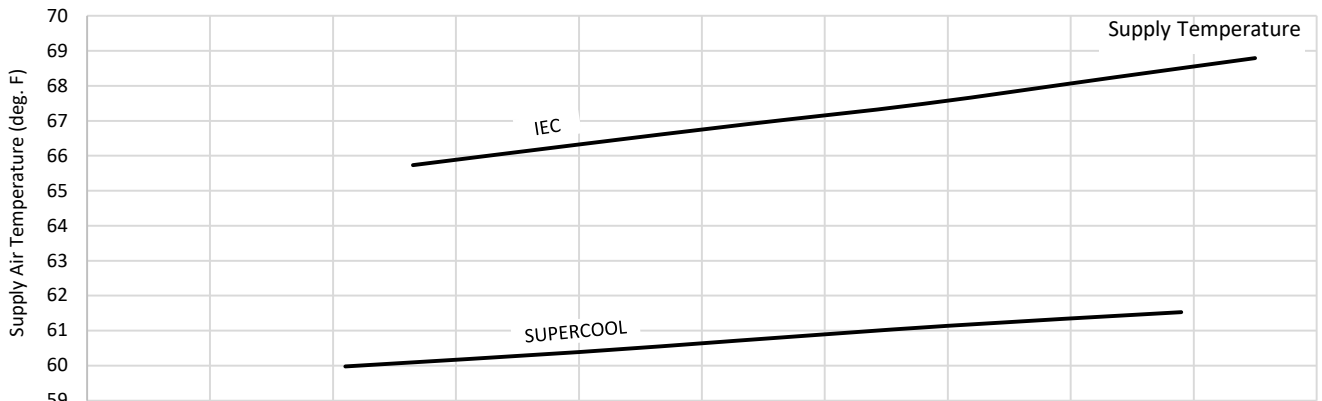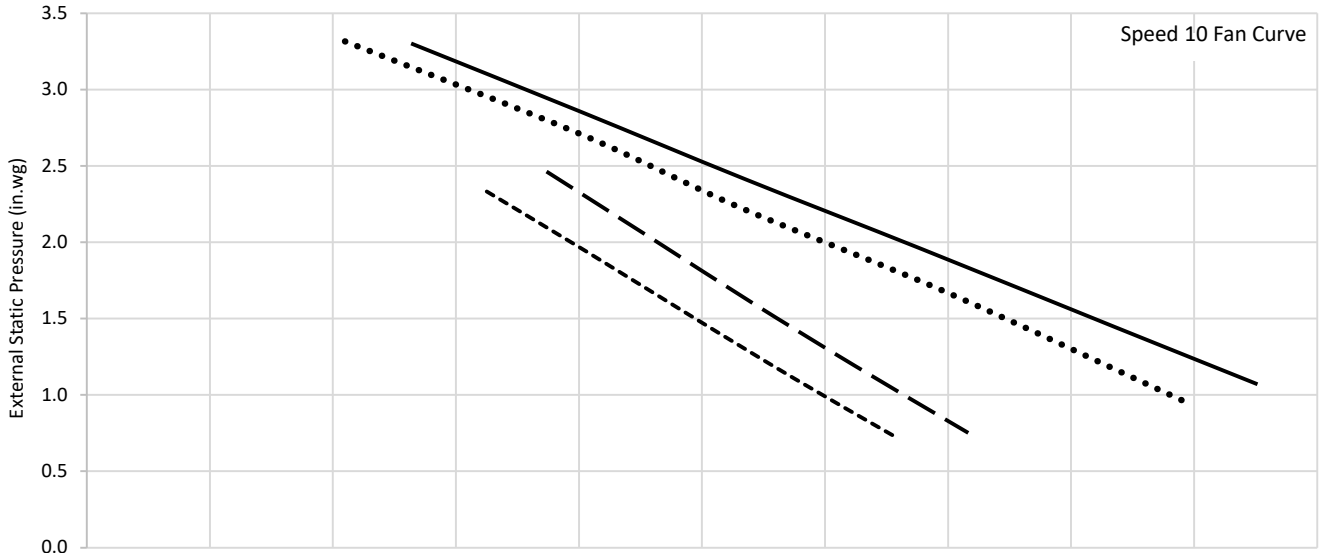


| | | Maximum Speed Sound Power Level (dB re 1 pW) | | | | | | | |
|----------------|----------|--|-----|-----|----|----|----|----|-------|
| | | Octave Band Centre Frequency | | | | | | | |
| FREQUENCY (Hz) | | 125 | 250 | 500 | 1k | 2k | 4k | 8k | Total |
| CW-80 | Radiated | 73 | 86 | 86 | 90 | 87 | 83 | 77 | 94 |

SUBMITTAL DATA SHEET – CW-80 WITH MULTI-MAGIC CONTROLS

| MODEL: | | | CW-80 IEC STANDARD CAPACITY FANS | CW-80 SUPERCOOL STANDARD CAPACITY FANS |
|----------------------|-------------------------------|--|---|---|
| SERVICES | Electrical | Voltage | 440-480 V / 3~ / 50-60Hz | 440-480 V / 3~ / 50-60Hz |
| | | FLA | 23 A | 24 A |
| | | MCA | 24 A | 25 A |
| | | MOPD | 25 A | 25 A |
| | | Input Power | 12.5 kW | 12.5 kW |
| | Water | Supply | 8 GPM MINIMUM 12 GPM RECOMMENDED @ 15 PSI - 145 PSI | 8 GPM MINIMUM 12 GPM RECOMMENDED @ 15 PSI - 145 PSI |
| | | Max Temperature | 105 °F | 105 °F |
| | | Inlet | 3/4" Male BSP | 3/4" Male BSP |
| | | Drain | 2" Flexible Coupling | 2" Flexible Coupling |
| | | Drain Flow Rate | 10.5 GPM | 10.5 GPM |
| Duct Connections | Supply Air | Side Discharge 74 x 81" | Side Discharge 74 x 81" | |
| | Exhaust Air | 4x Top Discharge Vents | 4x Top Discharge Vents | |
| ENVIRONMENT | Maximum Inlet Air Temperature | | 122 °F | 122 °F |
| AIR SYSTEMS | Supply Air Fan/Motor | Fan | 2x 22" Centrifugal | 2x 22" Centrifugal |
| | | Motor | 3.5 kW | 3.5 kW |
| | | Control | 0-10V Variable Speed | 0-10V Variable Speed |
| | | Maximum Speed | 1750 rpm | 1750 rpm |
| | Exhaust Air Fan/Motor | Fan | 4x 13" Centrifugal | 4x 13" Centrifugal |
| | | Motor | 1.7 kW | 1.7 kW |
| | | Control | 0-10V Variable Speed | 0-10V Variable Speed |
| | | Maximum Speed | 2600 rpm | 2600 rpm |
| | Air Filters | Inlet | MERV 8 Washable 25"x25"x2" - Qty. 16 | MERV 8 Washable 25"x25"x2" - Qty. 16 |
| | HEAT EXCHANGERS | Indirect Evaporative | | 16 Cores |
| Direct Evaporative | | NONE | 2 Chillcel® Pads | |
| WATER SYSTEMS | Tank (Reservoir) Capacity | | 48 Gal | 48 Gal |
| | Inlet Valve | | 24 VAC Solenoid Valve | 24 VAC Solenoid Valve |
| | Pump Indirect Heat Exchangers | | 1x 20 GPM @ 81 ft Head 440-480V / 3~ / 50-60 Hz Input Power 0.75 kW | 1x 20 GPM @ 81 ft Head 440-480V / 3~ / 50-60 Hz Input Power 0.75 kW |
| | Pump Direct Heat Exchangers | | NONE | 1x 10 GPM @ 45 ft Head 440-480V / 3~ / 50-60 Hz Input Power 0.25 kW |
| | Salinity Management | | Conductivity Probe | Conductivity Probe |
| | Chlorinator | | 230V, 50-60Hz | 230V, 50-60Hz |
| | Drain Valve | | 12 VAC Vertical | 12 VAC Vertical |
| DIMENSIONS | Shipping | Note: Exhaust Fans/ Motors, Weatherseals & Filters shipped loose. | 157" Long, 91" Wide, 101" High | 157" Long, 91" Wide, 101" High |
| | Operating | | 157" Long, 101" Wide, 139" High | 157" Long, 101" Wide, 139" High |
| WEIGHT | Shipping | exc. Loose items | 4,400 lb | 4,650 lb |
| | Operating | inc. Water & Extras | 5,950 lb | 6,300 lb |




SUBMITTAL DATA SHEET – CW-80 WITH MULTI-MAGIC CONTROLS

CW-80 IEC STANDARD CAPACITY FANS

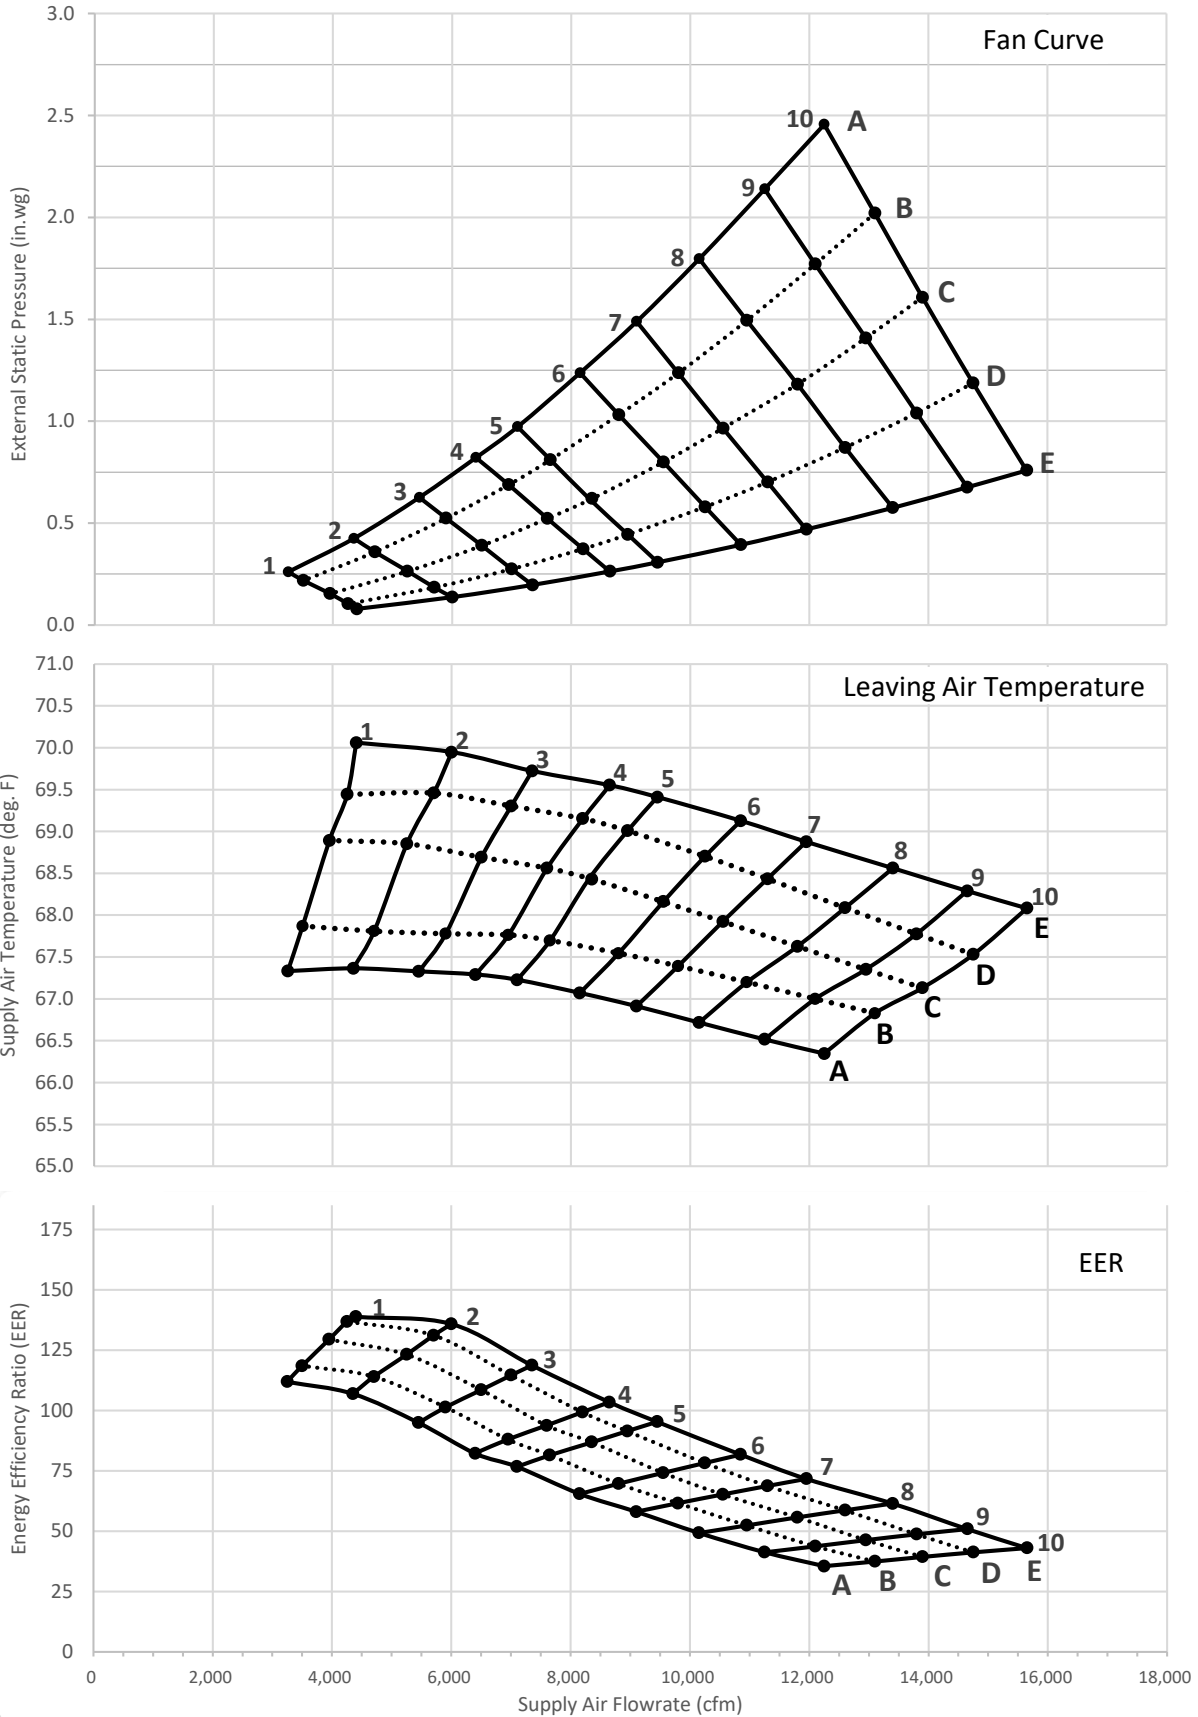

SUBMITTAL DATA SHEET – CW-80 WITH MULTI-MAGIC CONTROLS

CW-80 SUPERCOOL STANDARD CAPACITY FANS

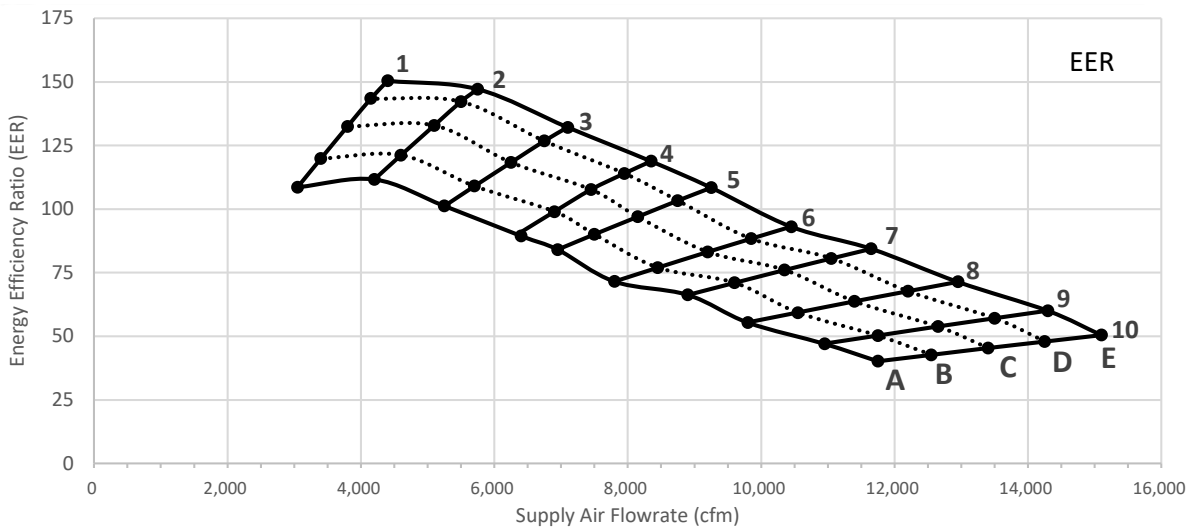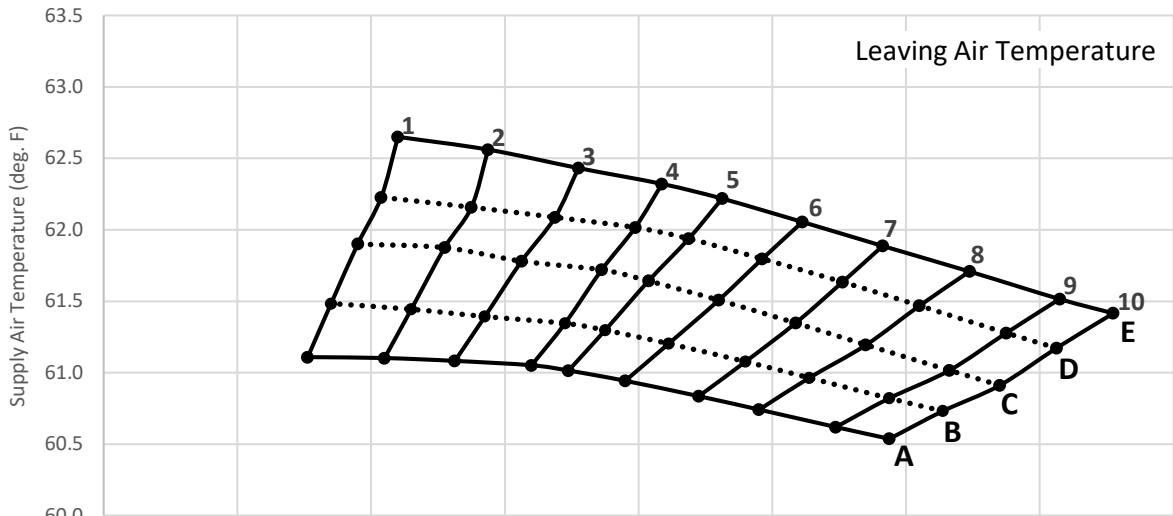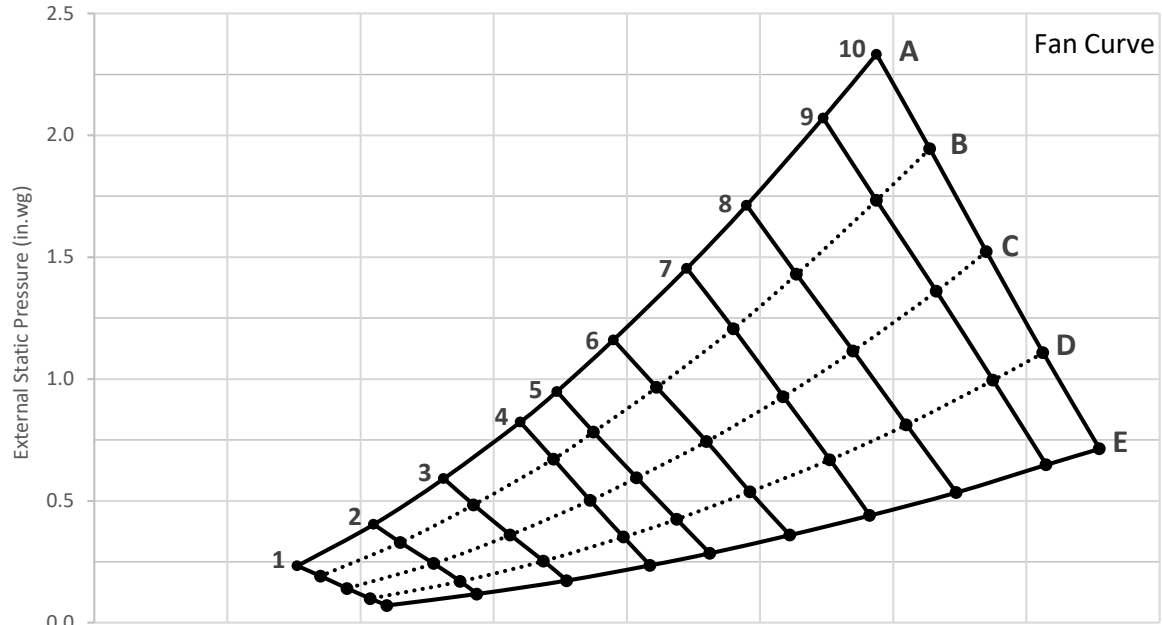

SUBMITTAL DATA SHEET – CW-80 WITH MULTI-MAGIC CONTROLS

| CW-80 IEC STANDARD CAPACITY SPEED 10 PERFORMANCE SUMMARY* | | | | | |
|---|---------|---------|---------|---------|---------|
| | A | B | C | D | E |
| EXTERNAL STATIC PRESSURE (IN. WG) | 2.5 | 2.0 | 1.6 | 1.2 | 0.8 |
| SUPPLY AIR FLOWRATE (CFM) | 12,250 | 13,100 | 13,900 | 14,750 | 15,650 |
| EXHAUST AIR FLOWRATE (CFM) | 10,500 | 10,250 | 10,300 | 10,150 | 9,800 |
| IEC LEAVING AIR TEMPERATURE (°F) | 66.3 | 66.8 | 67.1 | 67.5 | 68.1 |
| STANDALONE COOLING CAPACITY (BTU/HR) | 197,800 | 204,800 | 212,700 | 219,300 | 223,400 |
| PRE-COOLING CAPACITY (BTU/HR) | 445,200 | 469,300 | 493,400 | 517,200 | 539,500 |
| INPUT POWER (kW) | 12.5 | 12.5 | 12.5 | 12.5 | 12.5 |
| STANDALONE EER | 16 | 16 | 17 | 18 | 18 |
| PRE-COOLING EER | 38 | 39 | 41 | 43 | 43 |
| WATER CONSUMPTION (GPH) | 63 | 65 | 66 | 67 | 69 |

| CW-80 SUPERCOOL STANDARD CAPACITY SPEED 10 PERFORMANCE SUMMARY* | | | | | |
|---|---------|---------|---------|---------|---------|
| | A | B | C | D | E |
| EXTERNAL STATIC PRESSURE (IN. WG) | 2.3 | 1.9 | 1.5 | 1.1 | 0.7 |
| SUPPLY AIR FLOWRATE (CFM) | 11,750 | 12,550 | 13,400 | 14,250 | 15,100 |
| EXHAUST AIR FLOWRATE (CFM) | 9,600 | 9,600 | 9,450 | 9,400 | 9,200 |
| IEC LEAVING AIR TEMPERATURE (°F) | 66.6 | 67.0 | 67.4 | 67.8 | 68.2 |
| IDEC LEAVING AIR TEMPERATURE (°F) | 60.5 | 60.7 | 60.9 | 61.2 | 61.4 |
| STANDALONE COOLING CAPACITY (BTU/HR) | 263,500 | 278,800 | 295,100 | 309,800 | 324,300 |
| PRE-COOLING CAPACITY (BTU/HR) | 500,800 | 532,200 | 565,700 | 597,500 | 629,200 |
| INPUT POWER (kW) | 12.5 | 12.5 | 12.5 | 12.5 | 12.5 |
| STANDALONE EER | 21 | 22 | 24 | 25 | 26 |
| PRE-COOLING EER | 40 | 43 | 45 | 48 | 50 |
| WATER CONSUMPTION (GPH) | 67 | 70 | 73 | 75 | 78 |

* Leaving Air Temperatures, Cooling Capacities, EER and Water Consumption tested to ASHRAE 143 with design condition of: valid at design condition of: 100 °F dry-bulb, 70 °F wet-bulb, and 81.3 °F relief temperature.




| INPUT POWER (kW) | | | | | |
|------------------|-----------------------------|-----------------------------------|-------|-----------------------------|-----------------------------------|
| SPEED | CW-80 IEC STANDARD CAPACITY | CW-80 SUPERCOOL STANDARD CAPACITY | SPEED | CW-80 IEC STANDARD CAPACITY | CW-80 SUPERCOOL STANDARD CAPACITY |
| 10 | 12.5 | 12.5 | 5 | 3.3 | 3.5 |
| 9 | 9.9 | 9.9 | 4 | 2.8 | 2.9 |
| 8 | 7.4 | 7.5 | 3 | 2.0 | 2.2 |
| 7 | 5.6 | 5.7 | 2 | 1.4 | 1.6 |
| 6 | 4.4 | 4.6 | 1 | 1.0 | 1.2 |

SUBMITTAL DATA SHEET – CW-80 WITH MULTI-MAGIC CONTROLS

| MODEL: | | | CW-80 IEC HIGH CAPACITY FANS | CW-80 SUPERCool HIGH CAPACITY FANS |
|-----------------|-------------------------------|--|---|---|
| SERVICES | Electrical | Voltage | 440-480 V / 3~ / 50-60Hz | 440-480 V / 3~ / 50-60Hz |
| | | FLA | 25 A | 26 A |
| | | MCA | 27 A | 28 A |
| | | MOPD | 30 A | 30 A |
| | | Input Power | 14.5 kW | 14.5 kW |
| | Water | Supply | 8 GPM MINIMUM 12 GPM RECOMMENDED @ 15 PSI - 145 PSI | 8 GPM MINIMUM 12 GPM RECOMMENDED @ 15 PSI - 145 PSI |
| | | Max Temperature | 105 °F | 105 °F |
| | | Inlet | 3/4" Male BSP | 3/4" Male BSP |
| | | Drain | 2" Flexible Coupling | 2" Flexible Coupling |
| | Duct Connections | Supply Air | Side Discharge 74 x 81" | Side Discharge 74 x 81" |
| Exhaust Air | | 4x Top Discharge Vents | 4x Top Discharge Vents | |
| ENVIRONMENT | Maximum Inlet Air Temperature | 122 °F | 122 °F | |
| AIR SYSTEMS | Supply Air Fan/Motor | Fan | 2x 22" Centrifugal | 2x 22" Centrifugal |
| | | Motor | 4.25 kW | 4.25 kW |
| | | Control | 0-10V Variable Speed | 0-10V Variable Speed |
| | | Maximum Speed | 1750 rpm | 1750 rpm |
| | Exhaust Air Fan/Motor | Fan | 4x 13" Centrifugal | 4x 13" Centrifugal |
| | | Motor | 1.7 kW | 1.7 kW |
| | | Control | 0-10V Variable Speed | 0-10V Variable Speed |
| | | Maximum Speed | 2600 rpm | 2600 rpm |
| Air Filters | Inlet | MERV 8 Washable 25"x25"x2" - Qty. 16 | MERV 8 Washable 25"x25"x2" - Qty. 16 | |
| HEAT EXCHANGERS | Indirect Evaporative | 16 Cores | 16 Cores | |
| | Direct Evaporative | NONE | 2 Chillcel® Pads | |
| WATER SYSTEMS | Tank (Reservoir) Capacity | 48 Gal | 48 Gal | |
| | Inlet Valve | 24 VAC Solenoid Valve | 24 VAC Solenoid Valve | |
| | Pump Indirect Heat Exchangers | 1x 20 GPM @ 81 ft Head 440-480V / 3~ / 50-60 Hz Input Power 0.75 kW | 1x 20 GPM @ 81 ft Head 440-480V / 3~ / 50-60 Hz Input Power 0.75 kW | |
| | Pump Direct Heat Exchangers | NONE | 1x 10 GPM @ 45 ft Head 440-480V / 3~ / 50-60 Hz Input Power 0.25 kW | |
| | Salinity Management | Conductivity Probe | Conductivity Probe | |
| | Chlorinator | 230V, 50-60Hz | 230V, 50-60Hz | |
| | Drain Valve | 12 VAC Vertical | 12 VAC Vertical | |
| DIMENSIONS | Shipping | Note: Exhaust Fans/ Motors, Weatherseals & Filters shipped loose. | 157" Long, 91" Wide, 101" High | 157" Long, 91" Wide, 101" High |
| | Operating | | 157" Long, 101" Wide, 139" High | 157" Long, 101" Wide, 139" High |
| WEIGHT | Shipping | exc. Loose items | 4,400 lb | 4,650 lb |
| | Operating | inc. Water & Extras | 5,950 lb | 6,300 lb |


SUBMITTAL DATA SHEET – CW-80 WITH MULTI-MAGIC CONTROLS

CW-80 IEC HIGH CAPACITY FANS

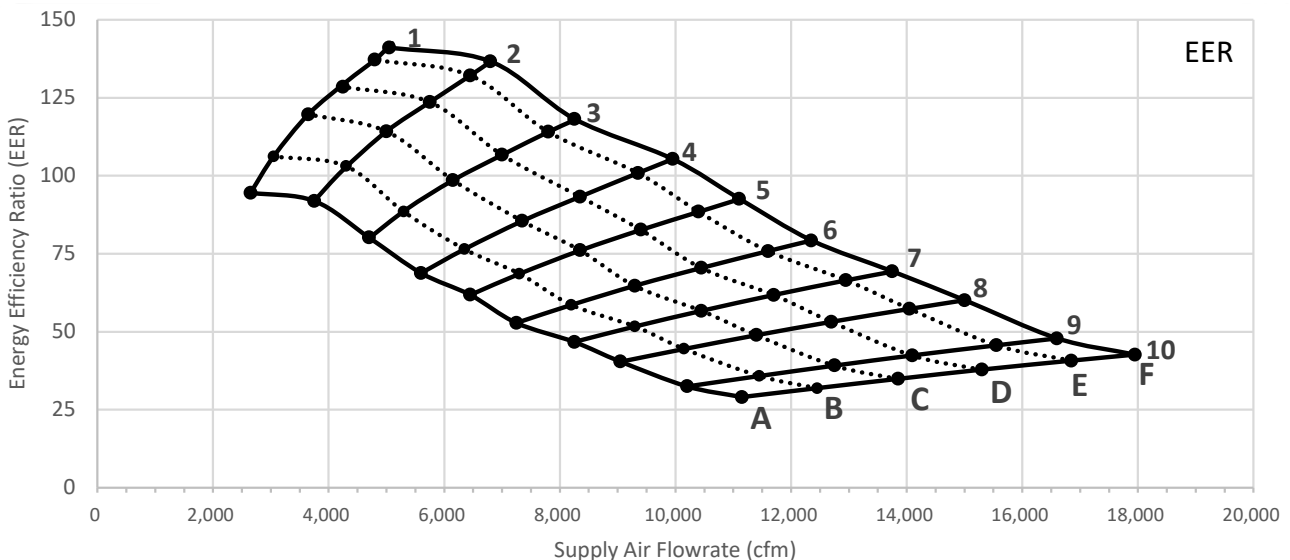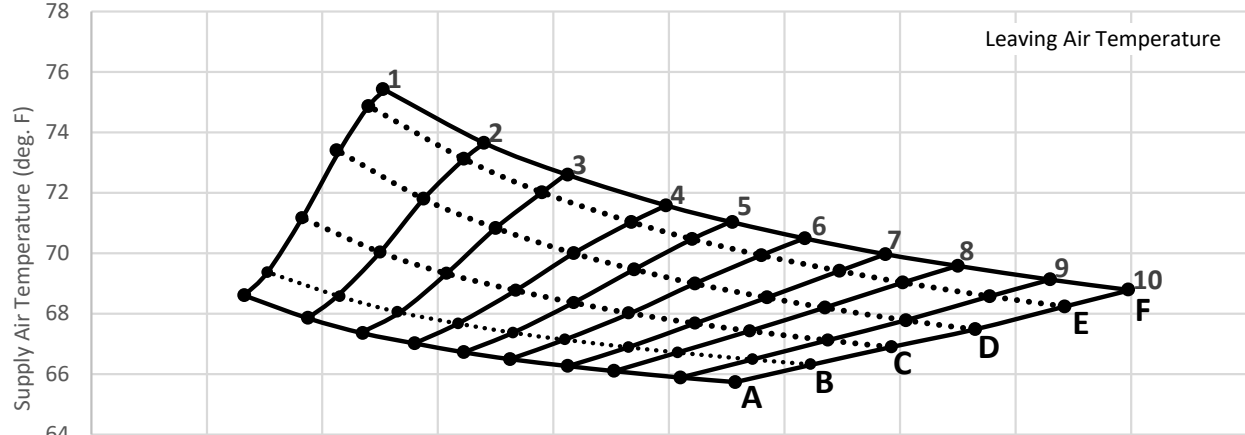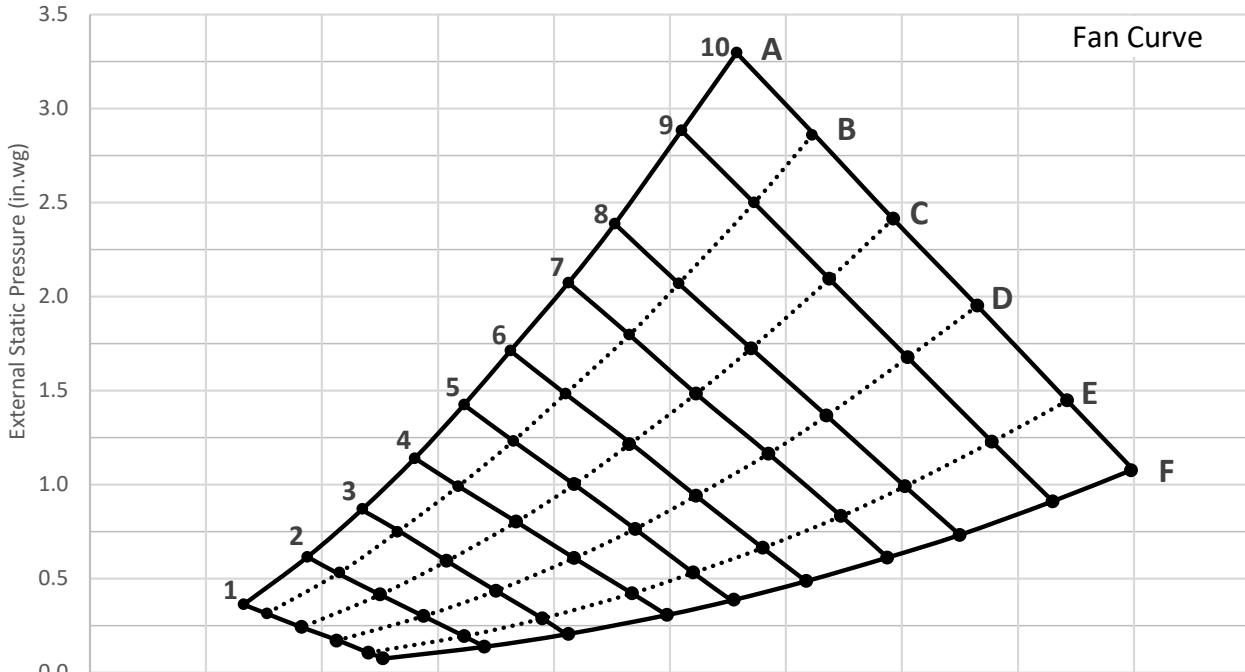

SUBMITTAL DATA SHEET – CW-80 WITH MULTI-MAGIC CONTROLS

CW-80 SUPERCOOL HIGH CAPACITY FANS

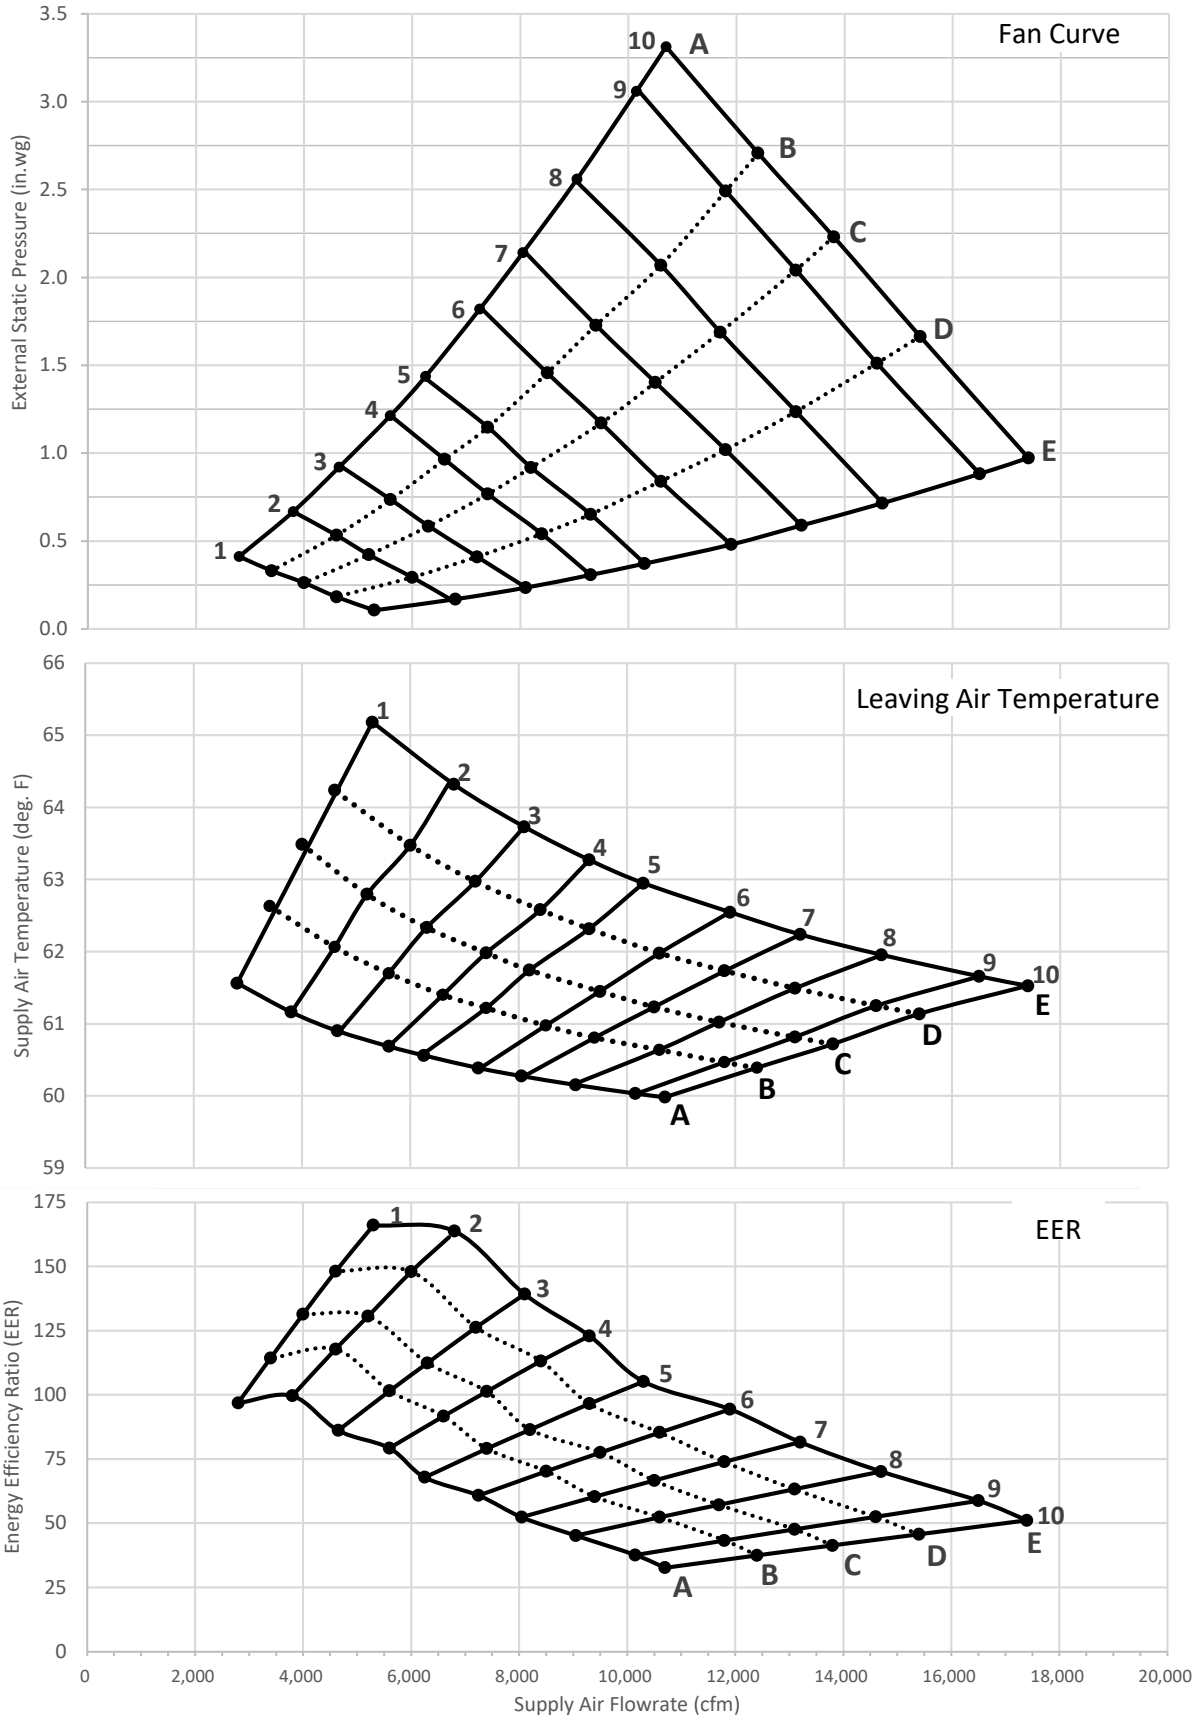

SUBMITTAL DATA SHEET – CW-80 WITH MULTI-MAGIC CONTROLS

| CW-80 IEC HIGH CAPACITY SPEED 10 PERFORMANCE SUMMARY* | | | | | | |
|--|----------|----------|----------|----------|----------|----------|
| | A | B | C | D | E | F |
| EXTERNAL STATIC PRESSURE (IN. WG) | 3.3 | 2.9 | 2.4 | 2.0 | 1.4 | 1.1 |
| SUPPLY AIR FLOWRATE (CFM) | 11,150 | 12,500 | 13,850 | 15,300 | 16,850 | 18,000 |
| EXHAUST AIR FLOWRATE (CFM) | 10,800 | 10,800 | 10,700 | 10,600 | 10,300 | 10,100 |
| IEC LEAVING AIR TEMPERATURE (°F) | 65.7 | 66.3 | 66.9 | 67.5 | 68.2 | 68.8 |
| STANDALONE COOLING CAPACITY (BTU/HR) | 187,400 | 202,200 | 215,400 | 228,300 | 237,700 | 243,200 |
| PRE-COOLING CAPACITY (BTU/HR) | 412,600 | 454,600 | 495,200 | 537,300 | 578,000 | 606,700 |
| INPUT POWER (kW) | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 |
| STANDALONE EER | 13 | 14 | 15 | 16 | 17 | 17 |
| PRE-COOLING EER | 29 | 32 | 35 | 38 | 41 | 43 |
| WATER CONSUMPTION (GPH) | 62 | 65 | 67 | 70 | 71 | 73 |

| CW-80 SUPERCOOL HIGH CAPACITY SPEED 10 PERFORMANCE SUMMARY* | | | | | |
|--|----------|----------|----------|----------|----------|
| | A | B | C | D | E |
| EXTERNAL STATIC PRESSURE (IN. WG) | 3.3 | 2.7 | 2.2 | 1.7 | 1.0 |
| SUPPLY AIR FLOWRATE (CFM) | 10,600 | 12,500 | 13,800 | 15,500 | 17,400 |
| EXHAUST AIR FLOWRATE (CFM) | 10,800 | 10,800 | 10,600 | 10,400 | 10,200 |
| IEC LEAVING AIR TEMPERATURE (°F) | 65.5 | 66.3 | 66.9 | 67.7 | 68.4 |
| IDEC LEAVING AIR TEMPERATURE (°F) | 60.0 | 60.4 | 60.7 | 61.1 | 61.5 |
| STANDALONE COOLING CAPACITY (BTU/HR) | 244,100 | 282,300 | 306,800 | 337,500 | 371,600 |
| PRE-COOLING CAPACITY (BTU/HR) | 458,100 | 534,700 | 585,500 | 650,600 | 723,000 |
| INPUT POWER (kW) | 14.2 | 14.2 | 14.2 | 14.2 | 14.2 |
| STANDALONE EER | 17 | 20 | 22 | 24 | 26 |
| PRE-COOLING EER | 32 | 38 | 41 | 46 | 51 |
| WATER CONSUMPTION (GPH) | 70 | 74 | 78 | 82 | 88 |

* Leaving Air Temperatures, Cooling Capacities, EER and Water Consumption tested to ASHRAE 143 with design condition of: valid at design condition of: 100 °F dry-bulb, 70 °F wet-bulb, and 81.3 °F relief temperature.

| INPUT POWER (kW) | | | | | |
|-------------------------|--------------------------------|--------------------------------------|--------------|--------------------------------|--------------------------------------|
| SPEED | CW-80 IEC HIGH CAPACITY | CW-80 SUPERCOOL HIGH CAPACITY | SPEED | CW-80 IEC HIGH CAPACITY | CW-80 SUPERCOOL HIGH CAPACITY |
| 10 | 14.2 | 14.2 | 5 | 3.8 | 3.9 |
| 9 | 11.6 | 11.6 | 4 | 2.9 | 3.0 |
| 8 | 8.2 | 8.6 | 3 | 2.1 | 2.3 |
| 7 | 6.4 | 6.6 | 2 | 1.4 | 1.6 |
| 6 | 5.0 | 5.1 | 1 | 1.0 | 1.2 |

SUBMITTAL DATA SHEET – CW-80 WITH MULTI-MAGIC CONTROLS

OPTIONS, FEATURES & ACCESSORIES

Multi-Magic® coolers are supplied with a series of interface terminals inside the electrical enclosure for use with additional accessories.

| ITEM | ID | TYPE |
|---------------------------------------|---------|--|
| MODBUS | + | RS-485 MODBUS Communication for Wall Controller or 3rd Party Master |
| | - | |
| | GND | |
| POWER SUPPLY | 24 VDC | DC Power Supply for Wall Controller, Sensors or BMS |
| | 0 VDC | |
| MULTI-MAGIC SENSORS (sold separately) | S1 | Flexible Sensor Inputs for use with Optional Sensors. See next page. |
| | S2 | |
| | S3 | |
| | S4 | |
| | S5 | |
| | S6 | |
| FAN STATUS | FAN STS | Fan Run Output. Relay Output Dry Contact, Adjustable Timer |
| | FAN COM | |
| FIRE | FIRE | Fire Terminals. Bridge to Run. |
| | FIRE | |

Multi-Magic® coolers can be controlled via 4 different methods

OPTION 1: BUILDING MANAGEMENT SYSTEM (BMS)

Multi-Magic® coolers are supplied with a series of low voltage BMS Interface Terminals to allow external devices, such as 3rd party controllers, to control the basic functions of the cooler.

| ITEM | ID | TYPE |
|------|-----|--|
| BMS | IEC | Digital Input Dry Contact |
| | DEC | Digital Input Dry Contact |
| | SPD | Supply Fan Speed: Analogue Input 0-10Vdc equates to Speeds 0 to 10 |
| | ERR | Error: Relay Output Dry Contact. Configurable NO/NC |
| | GND | GND |

OPTION 2: MULTI-MAGIC WALL CONTROLLER

(sold separately)

- MODBUS RS-485 to control up to 15 Devices
- Temperature & Relative Humidity Sensors
- Manual IEC, Supercool & Fan Speed Control
- Thermostatic Speed Control
- Supercool Humidity Setpoint
- 7-Day Thermostatic Program
- Room Sensor Averaging
- Ambient Condition Monitoring
- Min & Max Fan Speed Limits
- Screen Security Lock
- Auto-Restart Function
- Device Fault History
- English, Spanish, French, Italian, Portuguese



OPTION 3: RS-485 MODBUS PRIMARY

Modbus Registers are available for controlling and monitoring the basic functions of the connected coolers.

| REGISTER | TYPE | DETAILS | |
|--------------|------|----------|---|
| COMMANDS | | | |
| 9200 | UINT | Bit 0 | IEC Enable |
| | | Bit 1 | DEC Enable |
| | | Bit 2 | Fault Reset |
| | | Bit 3 | Manual Drain |
| 9201 | UINT | 0-1000 | Supply Fan Speed (0-100%) |
| STATUS | | | |
| 9205 | UINT | Bit 0 | Fault State |
| | | Bit 1 | Low Probe WET |
| | | Bit 2 | High Probe WET |
| | | Bit 3 | Inlet Solenoid Valve OPEN |
| | | Bit 4 | Drain Valve OPEN |
| | | Bit 5 | Indirect Pump RUNNING |
| | | Bit 6 | Direct Pump RUNNING |
| | | Bit 7 | Chlorinator RUNNING |
| 9206 | UINT | 0-100 | Supply Fan Speed (0-100%) |
| 9207 | UINT | 0-6615 | Water Salinity Level |
| 9208 | UINT | 0-100 | Chlorinator Output (%) |
| 9209 | UINT | | Fault Code |
| 9210 to 9215 | INT | S1 to S6 | Sensor Values depend on sensor type Temperature oF/10 Relative Humidity %/10 Pressure inwg/100 |
| 9216 | UNIT | 0-100 | Exhaust Fan Speed (0-100%) |

OPTION 4: BACNET MS/TP OR BACNET IP

BACnet objects are available for controlling and monitoring the basic functions of the connected coolers.

| OBJECT | DETAILS |
|----------------|--|
| COMMANDS | |
| CMD_IEC | IEC Enable |
| CMD_DEC | DEC Enable |
| CMD_Spd | 0 to 10 Fan Speed |
| CMD_Drain | Manual Drain |
| BCN_CMD_ON_OFF | Cooler Run |
| CMD_FaultReset | Reset Fault Codes |
| STATUS | |
| STSIEC | IEC Pump RUNNING |
| STSDEC | DEC Pump RUNNING |
| STSError | Fault |
| STSLowProbe | Low Probe WET |
| STSHighProbe | High Probe WET |
| STSolenoid | Inlet Solenoid OPEN |
| STSDrain | Drain Valve OPEN |
| STSChlorinator | Chlorinator RUNNING |
| STSSupplyFSpd | Supply Fan Speed: Range 0 to 10 |
| STSSalinity | Water Salinity Level (uS/cm) |
| STSFaultCode | Fault Code. |
| STSExhaustFSpd | Supply Fan Speed (Vdc) |
| STSensor1 | Sensor Values depend on sensor type Ambient Sensor Temperature -40 to 158°F Room & Duct Sensor Temperature 32 to 122°F Relative Humidity 0 to 100 % Pressure Sensor 0 to 2.00 inwg |
| STSensor2 | |
| STSensor3 | |
| STSensor4 | |
| STSensor5 | |
| STSensor6 | |

SUBMITTAL DATA SHEET – CW-80 WITH MULTI-MAGIC CONTROLS

OPTIONAL SENSORS ACCESSORIES

(sold separately)

For all sensors:

Operating Voltage DC 24V

Signal Output DC 0...10 V

Accuracy at 73°F and 50% r.h.

Temperature: $\pm 0.3K$

Relative Humidity: $\pm 3\%$ r.h.

Pressure $\pm 1\%$

Each CW-80 cooler had six sensors inputs, configured in pairs, for use with the following optional sensors. All sensor values are readable by Building Management Systems (Low Voltage, Modbus or BACnet).

ROOM TEMPERATURE & RELATIVE HUMIDITY SENSOR

Temperature Range
+32...+122°F

Relative Humidity Range
0...100% r.h.

IP30



When used in conjunction with the Multi-Magic® Wall Controller:

- Allows the Wall Controller to be located safely away from the conditioned space. Wall Controller sensor values are disabled and only Room Sensor used for setpoint control.
- Multiple Room Sensor values from multiple coolers can be averaged together to provide overall temperature and relative humidity values for larger spaces.

AMBIENT TEMPERATURE & RELATIVE HUMIDITY SENSOR

Temperature Range
-40...+158°F

Relative Humidity Range
0...100% r.h.

Radiation Shield
IP65



When used in conjunction with the Multi-Magic® Wall Controller:

- Ambient Condition Monitoring mode uses advanced formulas to calculate a predicted supply temperature. Coolers are disabled if the predicted supply temperature is greater than the current room temperature.
- Particularly suitable for applications which require room temperatures less than 68 °F.

DUCT TEMPERATURE & RELATIVE HUMIDITY SENSOR

Temperature Range
+32...+122°F

Relative Humidity Range
0...100% r.h.

IP54

Probe length inside duct min.
3.5", max 6"



- Can be used by Building Management Systems (Low Voltage, Modbus or BACnet) to monitor cooler supply air conditions.

DIFFERENTIAL PRESSURE SENSOR

Pressure Range
0...+2.00 inwg.

IP66

LCD Display

Includes Static Pressure Tip
4" insertion depth.



- Can be used by Building Management Systems (Low Voltage, Modbus or BACnet) to monitor pressure drops.