

SUBMITTAL DATA SHEET – CW-H WITH MULTI-MAGIC CONTROLS

Job Name:

Order No.:

Project Manager:

Submitted To:

Date:

Special
Instructions:

Location:

Contractor:

Engineer:

Submitted By:

Asset ID:

MODEL	QUANTITY	STANDARD FEATURES
CW-H15		<input checked="" type="checkbox"/> Indirect Evaporative Cooling.
CW-H15S		<input checked="" type="checkbox"/> Patented high technology CW Indirect Cooling cores.
CW-H15S PLUS		<input checked="" type="checkbox"/> Fresh, outside air for better indoor air quality (IAQ).
VOLTAGE SELECTION		<input checked="" type="checkbox"/> No refrigerants or ozone depleting chemicals.
440-480V / 3~	200-240V / 3~	200-240V / 1~
COOLING APPLICATION		<input checked="" type="checkbox"/> Quiet and vibration free operation.
Standalone	Pre-Cooling	Supplementary
DESIGN CONDITIONS		<input checked="" type="checkbox"/> Filtered air with reduced dust, pollens and allergens.
<u>Outdoor Ambient Conditions:</u>		<input checked="" type="checkbox"/> High EER (Energy Efficiency Ratio).
Dry Bulb	°F	<input checked="" type="checkbox"/> Horizontal side discharge for conditioned air.
Wet Bulb	°F	<input checked="" type="checkbox"/> Horizontal discharge for exhaust air.
Elevation Above Sea Level	ft	<input checked="" type="checkbox"/> Low maintenance, simple winterization
<u>Fan Duty Point:</u>		<input checked="" type="checkbox"/> Integrated PLC for internal control.
Supply Air Volume	cfm	<input checked="" type="checkbox"/> Integrated water management system.
External Static Pressure	in.wg	<input checked="" type="checkbox"/> Removable panels for easy maintenance access.
<u>Performance:</u>		<input checked="" type="checkbox"/> Easy to connect power/control wiring.
Supply Air Temperature	°F	<input checked="" type="checkbox"/> BMS/BAS control terminals.
Cooling Capacity	BTU/hr	<input checked="" type="checkbox"/> Modbus RS-485 control terminals.
OPTIONAL ACCESSORIES	QUANTITY	<input checked="" type="checkbox"/> 1x Backward-curved centrifugal supply fans.
MERV13 Airfilters		<input checked="" type="checkbox"/> Direct coupled EC fan motors.
Multi-Magic Wall Controller		<input checked="" type="checkbox"/> Molded plastic (ABS) water tank.
Room Temperature & Humidity Sensor		<input checked="" type="checkbox"/> Cabinet constructed with marine grade aluminum.
Ambient Temperature & Humidity Sensor		<input checked="" type="checkbox"/> Built-in forklift tyne openings for lifting the cooler.
Duct Temperature & Humidity Sensor		<input checked="" type="checkbox"/> 1-year limited warranty.
Differential Pressure Sensor		<input checked="" type="checkbox"/> ETL Listed to UL Standard 507
Roofstand 0-10°		
Float Switch Kit		

SUBMITTAL DATA SHEET – CW-H WITH MULTI-MAGIC CONTROLS

GENERAL

Climate Wizard coolers are characterized by the supply of 100% fresh, cool, outside air with NO additional moisture added, with greatly reduced energy consumption relative to an equivalent refrigerated system performing the same duty.

The cooler comprises of a supply air fan, an indirect heat exchanger pack, integrated water reservoir, pumps, and chlorinator system.

CW-H15S and CW-H15S Plus can be operated in “Supercool” mode producing even colder supply air with added moisture (direct cooling). Supercool coolers have an additional pump and Chillcel® pads.

CABINET

The cabinet is constructed from coated marine grade aluminum incorporating the motor/fan assembly, non-corrodible heat exchange core and other ancillary equipment mounted on a heavy gauge base frame for structural stability.

Forklift tine channels are provided within the frame to facilitate transport and lifting.

Components are effectively treated to ensure corrosion resistance and mechanical fasteners are zinc coated, stainless steel or aluminum.

Connection surfaces are provided for outlet supply air and exhaust ductwork to be fitted using established industry practices.

FAN & MOTOR

The fan is a multi-blade, centrifugal type with backward curved blades. It has a cast aluminum rotor and plastic impeller which is statically and dynamically balanced.

The fan is directly mounted to the electric motor. The electric motor is high efficiency, inverter driven and responsive to 0-10V control signals to implement speed control that delivers optimum efficiency at lower speed operation.

HEAT EXCHANGE CORE

The heat exchange cores are designed to facilitate heat exchange between the wet air passages and the dry air passages such that high efficiency heat transfer takes place without the addition of any additional moisture.

They are designed to provide long life and consistent, long term high efficiency.

Supercool models are fitted with additional Chillcel® fabricated, honeycomb direct cooling pads.

WATER MANAGEMENT SYSTEM

The water supply connection is a ½” fitting that connects directly to the internally mounted solenoid valve.

Water is held in an internal reservoir manufactured as a one-piece molded polymer construction to ensure durability and corrosion resistance.

Heat exchange core saturation is achieved through internally mounted pumps delivering water to a specially designed non-clog water distribution system guaranteeing continuous uniform flow.

The pumps are manufactured from engineering plastics, with stainless steel shafts and fully encapsulated synchronous motors with thermal overload protection. They are provided with an easily cleanable strainer within the reservoir section.

An electronic water management system controls the maximum salinity level and chlorination of the reservoir water through continuous monitoring and replenishment.


The reservoir is drained by an electric drain valve that responds to the water management control system. The design of the reservoir ensures that no water remains after draining.

ELECTRICAL CABINET AND CONTROLS

All electrical control equipment including supply connection terminals, motor control hardware, BMS interface electronics, and water management hardware is pre-wired and factory mounted within a robust IP66 enclosure meeting the requirements for outdoor mounting.


AIR FILTERS

Intake air is filtered through MERV 8 pleated filters, with MERV 13 available as an optional extra. The assembly includes a safety screen to protect the fan and a cover to minimize intrusion of rain.

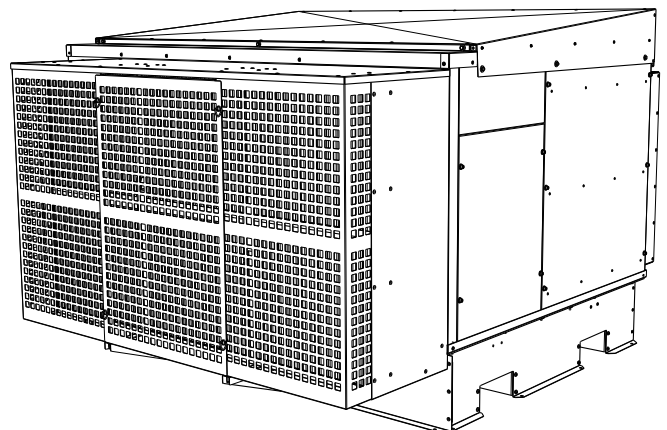


SUBMITTAL DATA SHEET – CW-H WITH MULTI-MAGIC CONTROLS

TOP

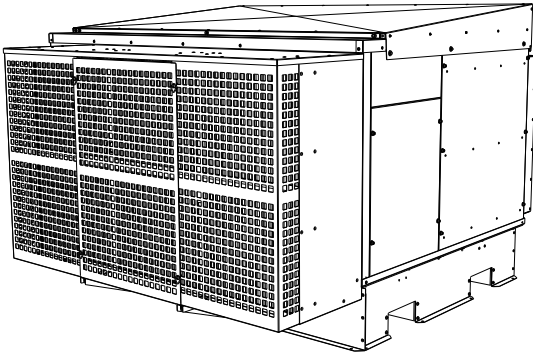


ILL1916-C

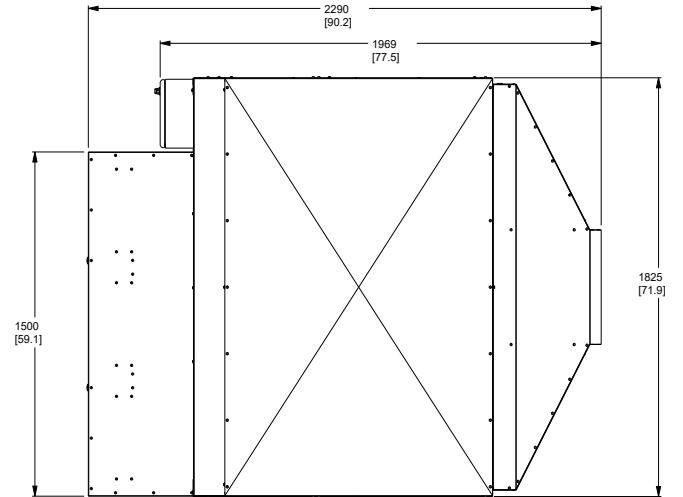

ILL1918-C


REAR

REAR COWLING PANEL AND TWO RIGHT FILTERS
HIDDEN FOR CLARITY

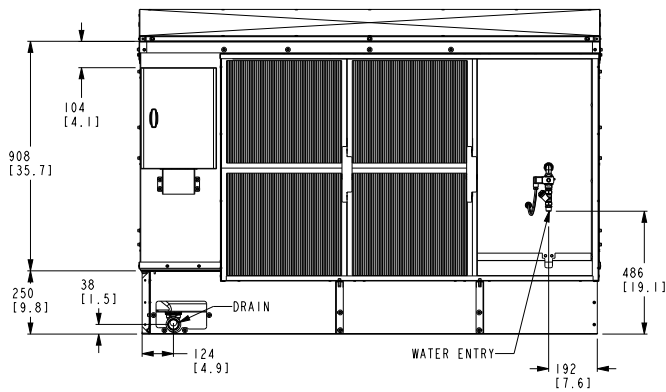


ILL1917

SIDE

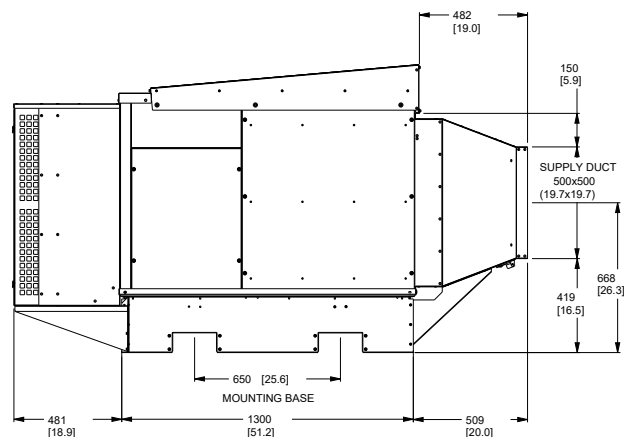


ILL1919-C

FRONT

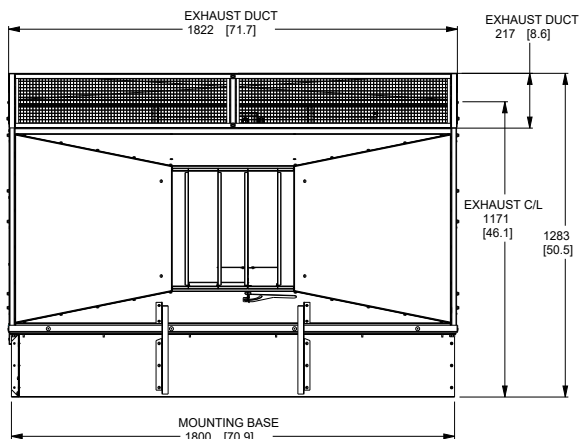

ILL2422-C

BOTTOM

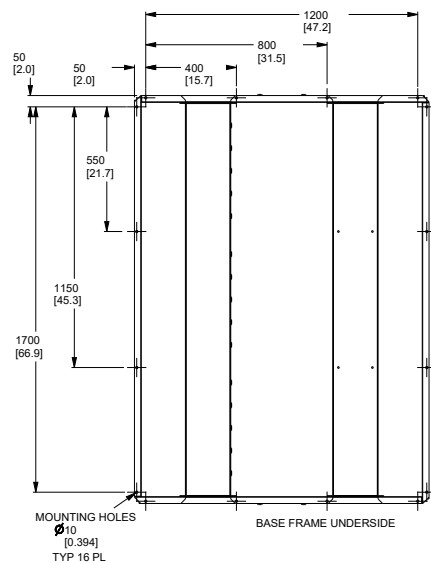

ILL1920-C

NOTE: Installers must allow adequate access to and around the cooler for Maintenance. Provision must be made for access to power, control, water supplies and drains. It is important that the cooler is level in all directions. Refer to the Installation Manual for full details.

Dimensions are in mm (inches in brackets).

SUBMITTAL DATA SHEET – CW-H WITH MULTI-MAGIC CONTROLS

		MODEL:	CW-H15	CW-H15S	CW-H15S PLUS
SERVICES	Electrical	Voltage Maximum Rated Current	440-480 V / 3~ / 60Hz 3 FLA / 8.5 MCA / 15 MOPD	440-480 V / 3~ / 60Hz 3 FLA / 8.5 MCA / 15 MOPD	440-480 V / 3~ / 60Hz 3 FLA / 8.5 MCA / 15 MOPD
			200-240 V / 3~ / 60Hz 6 FLA / 14.5 MCA / 20 MOPD	200-240 V / 3~ / 60Hz 6 FLA / 14.5 MCA / 20 MOPD	200-240 V / 3~ / 60Hz 6 FLA / 14.5 MCA / 20 MOPD
			200-240 V / 1~ / 60Hz 8 FLA / 11.5 MCA / 15 MOPD	200-240 V / 1~ / 60Hz 8 FLA / 12 MCA / 15 MOPD	200-240 V / 1~ / 60Hz 8 FLA / 12 MCA / 15 MOPD
		Input Power	1.8 kW	1.8 kW	2.2 kW
	Water	Supply	2.6 GPM MINIMUM 5.3 GPM RECOMMENDED @ 15 PSI - 115 PSI	2.6 GPM MINIMUM 5.3 GPM RECOMMENDED @ 15 PSI - 115 PSI	2.6 GPM MINIMUM 5.3 GPM RECOMMENDED @ 15 PSI - 115 PSI
		Max Temperature	105 °F	105 °F	105 °F
		Inlet	1/2" Male NPT	1/2" Male NPT	1/2" Male NPT
		Drain	1.5" Flexible Coupling	1.5" Flexible Coupling	1.5" Flexible Coupling
		Drain Flow Rate	4 GPM	4 GPM	4 GPM
	Duct Connections	Supply Air	Side Discharge 20 x 20 in	Side Discharge 20 x 20 in	Side Discharge 20 x 20 in
		Exhaust Air	Side Discharge 72 x 9 in	Side Discharge 72 x 9 in	Side Discharge 72 x 9 in
ENVIRONMENT	Max Inlet Air Temperature		131 °F	131 °F	131 °F
AIR SYSTEMS	Supply Air Fan/Motor	Fan	1x 22" Centrifugal Backward Curve	1x 22" Centrifugal Backward Curve	1x 22" Centrifugal Backward Curve
		Motor	3.5 kW	3.5 kW	3.5 kW
		Control	0-10V Variable Speed	0-10V Variable Speed	0-10V Variable Speed
		Max Speed	1350 rpm	1350 rpm	1460 rpm
Air Filters	Inlet	MERV 8 Disposable 18" x 20" x 2" - Qty 6	MERV 8 Disposable 18" x 20" x 2" - Qty 6	MERV 8 Disposable 18" x 20" x 2" - Qty 6	
HEAT EXCHANGERS	Indirect Evaporative		3 Cores	3 Cores	3 Cores
	Direct Evaporative		NONE	3 Chillcel® Pads	3 Chillcel® Pads
WATER SYSTEMS	Tank (Reservoir) Capacity		17.2 Gal	17.2 Gal	17.2 Gal
	Inlet Valve		12 VDC Solenoid Valve	12 VDC Solenoid Valve	12 VDC Solenoid Valve
	Pumps Indirect Heat Exchangers		2 Pumps 3.4 GPM @ 60" Head 200-240V 60Hz 32W ea.	2 Pumps 3.4 GPM @ 60" Head 200-240V 60Hz 32W ea.	2 Pumps 3.4 GPM @ 60" Head 200-240V 60Hz 32W ea.
	Pump Direct Heat Exchangers		NONE	1 Pump 3.4 GPM @ 60" Head 200-240V 60Hz 32W ea.	1 Pump 3.4 GPM @ 60" Head 200-240V 60Hz 32W ea.
	Salinity Management		Conductivity Probe	Conductivity Probe	Conductivity Probe
	Chlorinator		12 VDC	12 VDC	12 VDC
	Drain Valve		12 VDC Vertical	12 VDC Vertical	12 VDC Vertical
DIMENSIONS	Shipping		90" Long, 77" Wide, 50" High	90" Long, 77" Wide, 50" High	90" Long, 77" Wide, 50" High
	Operating inc. Accessories		90" Long, 72" Wide, 51" High	90" Long, 72" Wide, 51" High	90" Long, 72" Wide, 51" High
WEIGHT	Shipping		660 lb	695 lb	695 lb
	Operating inc. Water/Accessories		730 lb	760 lb	760 lb

		MAXIMUM SPEED SOUND POWER LEVEL (DB RE 1 PW)							
		OCTAVE BAND CENTRE FREQUENCY							
FREQUENCY (HZ)		125	250	500	1K	2K	4K	8K	TOTAL
CW-H15	RADIATED	84	68	65	62	55	51	44	70
CW-H15S	RADIATED	68	69	64	63	60	53	44	73
CW-H15S PLUS	RADIATED	71	70	66	64	61	55	48	75

SUBMITTAL DATA SHEET – CW-H WITH MULTI-MAGIC CONTROLS


CW-H15 MAXIMUM SPEED PERFORMANCE SUMMARY*			
	A	B	C
EXTERNAL STATIC PRESSURE (IN. WG)	0.77	0.60	0.43
SUPPLY AIR FLOWRATE (CFM)	1910	2330	2750
EXHAUST AIR FLOWRATE (CFM)	2200	1960	1710
IEC LEAVING AIR TEMPERATURE (°F)	66	68	70
STANDALONE COOLING CAPACITY (BTU/HR)	32,300	33,000	33,600
PRE-COOLING CAPACITY (BTU/HR)	72,300	81,800	91,200
INPUT POWER (kW)	1.8	1.8	1.8
STANDALONE EER	18	18	18
PRE-COOLING EER	40	45	50
WATER CONSUMPTION (GPH)	14	14	13

CW-H15S MAXIMUM SPEED PERFORMANCE SUMMARY*			
	D	E	F
EXTERNAL STATIC PRESSURE (IN. WG)	0.69	0.47	0.25
SUPPLY AIR FLOWRATE (CFM)	1910	2330	2750
EXHAUST AIR FLOWRATE (CFM)	2200	1960	1710
IEC LEAVING AIR TEMPERATURE (°F)	66	68	70
IDEC LEAVING AIR TEMPERATURE (°F)	60	61	61
STANDALONE COOLING CAPACITY (BTU/HR)	44,100	51,200	58,400
PRE-COOLING CAPACITY (BTU/HR)	89,900	100,100	116,300
INPUT POWER (kW)	1.8	1.8	1.8
STANDALONE EER	24	28	32
PRE-COOLING EER	45	54	63
WATER CONSUMPTION (GPH)	15	16	16

CW-H15S PLUS MAXIMUM SPEED PERFORMANCE SUMMARY*			
	G	H	I
EXTERNAL STATIC PRESSURE (IN. WG)	0.48	0.33	0.02
SUPPLY AIR FLOWRATE (CFM)	3180	3390	3810
EXHAUST AIR FLOWRATE (CFM)	1220	1130	950
IEC LEAVING AIR TEMPERATURE (°F)	75	77	79
IDEC LEAVING AIR TEMPERATURE (°F)	63	63	64
STANDALONE COOLING CAPACITY (BTU/HR)	63,300	65,100	68,600
PRE-COOLING CAPACITY (BTU/HR)	130,800	136,600	148,100
INPUT POWER (kW)	2.1	2.1	2.1
STANDALONE EER	31	31	33
PRE-COOLING EER	63	66	70
WATER CONSUMPTION (GPH)	16	17	17

* Leaving Air Temperatures, Cooling Capacities, EER and Water Consumption tested to ASHRAE 143 with design condition of: 100 °F dry-bulb, 70 °F wet-bulb and 81 °F room exit temperature.

SUBMITTAL DATA SHEET – CW-H WITH MULTI-MAGIC CONTROLS

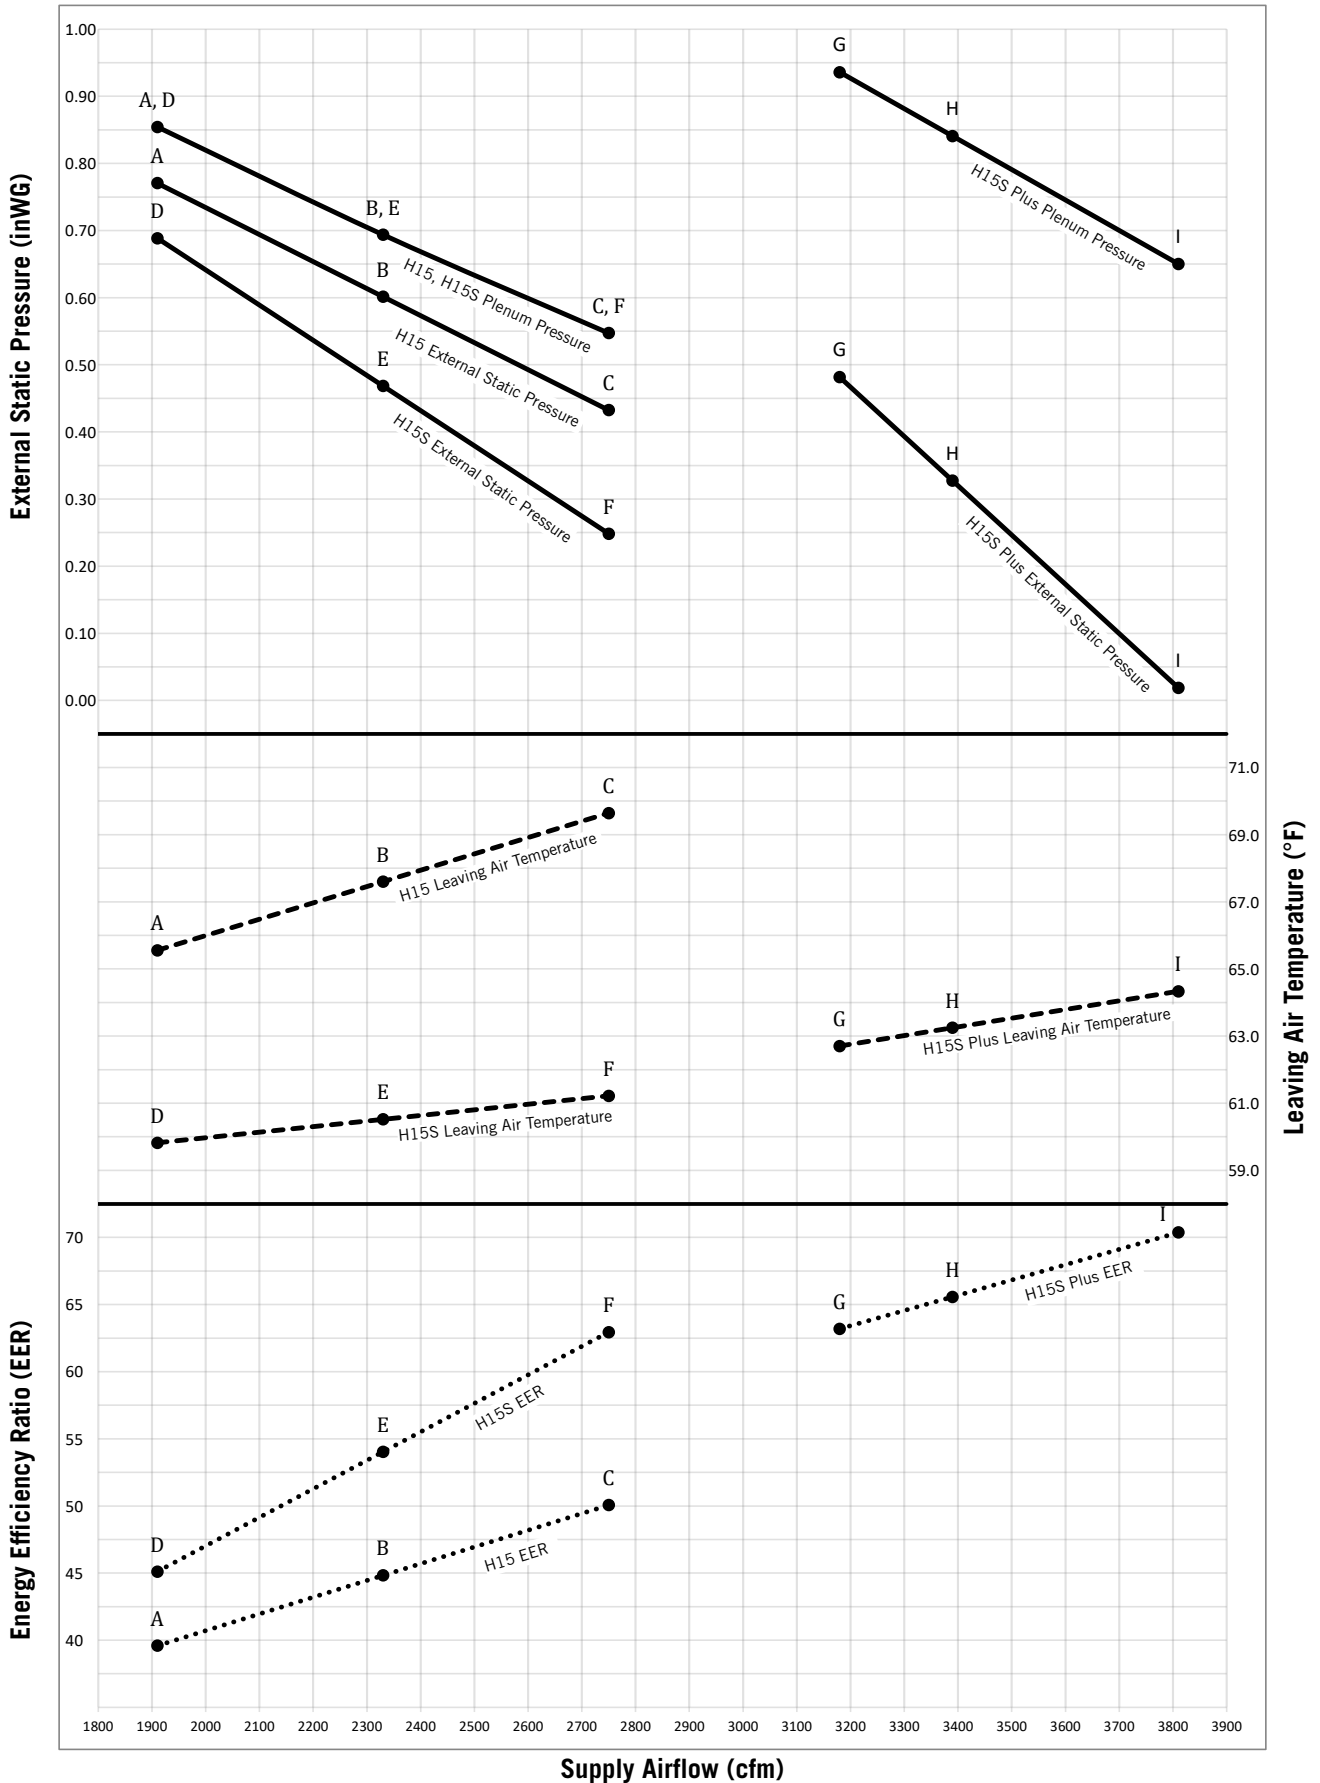

SUBMITTAL DATA SHEET – CW-H WITH MULTI-MAGIC CONTROLS

OPTIONS, FEATURES & ACCESSORIES

Multi-Magic® coolers are supplied with a series of interface terminals inside the electrical enclosure for use with additional accessories.

ITEM	ID	TYPE
MODBUS	+	RS-485 MODBUS Communication for Wall Controller or 3rd Party Master
	-	
	GND	
POWER SUPPLY	24 VDC	DC Power Supply for Wall Controller, Sensors or BMS
	0 VDC	
MULTI-MAGIC SENSORS (sold separately)	S1	Flexible Sensor Inputs for use with Optional Sensors. See next page.
	S2	
	S3	
	S4	
FAN STATUS	FAN STS	Fan Run Output. Relay Output Dry Contact, Adjustable Timer
	FAN COM	
FIRE	FIRE	Fire Terminals. Bridge to Run.
	FIRE	

Multi-Magic® coolers can be controlled via 4 different methods

OPTION 1: BUILDING MANAGEMENT SYSTEM (BMS)

Multi-Magic® coolers are supplied with a series of low voltage BMS Interface Terminals to allow external devices, such as 3rd party controllers, to control the basic functions of the cooler.

ITEM	ID	TYPE
BMS	IEC	Digital Input Dry Contact
	DEC	Digital Input Dry Contact
	SPD	Supply Fan Speed: Analogue Input 0-10Vdc equates to Speeds 0 to 10
	ERR	Error: Relay Output Dry Contact. Configurable NO/NC
	GND	GND

OPTION 2: MULTI-MAGIC WALL CONTROLLER (sold separately)

- MODBUS RS-485 to control up to 15 Devices
- Temperature & Relative Humidity Sensors
- Manual IEC, Supercool & Fan Speed Control
- Thermostatic Speed Control
- Supercool Humidity Setpoint
- 7-Day Thermostatic Program
- Room Sensor Averaging
- Ambient Condition Monitoring
- Min & Max Fan Speed Limits
- Screen Security Lock
- Auto-Restart Function
- Device Fault History
- English, Spanish, French, Italian, Portuguese



OPTION 3: RS-485 MODBUS PRIMARY

Modbus Registers are available for controlling and monitoring the basic functions of the connected coolers.

REGISTER	TYPE	DETAILS	
COMMANDS			
9200	UINT	Bit 0	IEC Enable
		Bit 1	DEC Enable
		Bit 2	Fault Reset
		Bit 3	Manual Drain
9201	UINT	0-1000	Supply Fan Speed (0-100%)
STATUS			
9205	UINT	Bit 0	Fault State
		Bit 1	Low Probe WET
		Bit 2	High Probe WET
		Bit 3	Inlet Solenoid Valve OPEN
		Bit 4	Drain Valve OPEN
		Bit 5	Indirect Pump RUNNING
		Bit 6	Direct Pump RUNNING
		Bit 7	Chlorinator RUNNING
9206	UINT	0-100	Supply Fan Speed (0-100%)
9207	UINT	0-6615	Water Salinity Level
9208	UINT	0-100	Chlorinator Output (%)
9209	UINT		Fault Code
9210	INT	S1	Sensor Values depend on sensor type Temperature °F/10 Relative Humidity %/10 Pressure inwg/100
9211	INT	S2	
9212	INT	S3	
9213	INT	S4	

OPTION 4: BACNET MS/TP OR BACNET IP

BACnet objects are available for controlling and monitoring the basic functions of the connected coolers.

OBJECT	DETAILS
COMMANDS	
CMD_IEC	IEC Enable
CMD_DEC	DEC Enable
CMD_Spd	0 to 10 Fan Speed
CMD_Drain	Manual Drain
BCN_CMD_ON_OFF	Cooler Run
CMD_FaultReset	Reset Fault Codes
STATUS	
STSIEC	IEC Pump RUNNING
STSDEC	DEC Pump RUNNING
STSERROR	Fault
STSLowProbe	Low Probe WET
STSHighProbe	High Probe WET
STSSolenoid	Inlet Solenoid OPEN
STSDrain	Drain Valve OPEN
STSChlorinator	Chlorinator RUNNING
STSSupplyFSpd	Supply Fan Speed Range 0 to 10
STSSalinity	Water Salinity Level (uS/cm)
STSchIPWM	Chlorinator PWM %
STSFaultCode	Fault Code.
STSensor1	Sensor Values depend on sensor type
STSensor2	Ambient Sensor Temperature -40 to 158°F
STSensor3	Room & Duct Sensor Temperature 32 to 122°F
STSensor4	Relative Humidity 0 to 100 %
	Pressure Sensor 0 to 2.00 inwg

SUBMITTAL DATA SHEET – CW-H WITH MULTI-MAGIC CONTROLS

OPTIONAL SENSORS ACCESSORIES

(sold separately)

For all sensors:

Operating Voltage DC 24V

Signal Output DC 0...10 V

Accuracy at 73°F and 50% r.h.

Temperature: $\pm 0.3K$

Relative Humidity: $\pm 3\%$ r.h.

Pressure $\pm 1\%$

Each CW-H cooler had four sensors inputs, configured in pairs, for use with the following optional sensors. All sensor values are readable by Building Management Systems (Low Voltage, Modbus or BACnet).

ROOM TEMPERATURE & RELATIVE HUMIDITY SENSOR

Temperature Range
0...+122°F

Relative Humidity Range
0...100% r.h.

IP30

When used in conjunction with the Multi-Magic® Wall Controller:

- Allows the Wall Controller to be located safely away from the conditioned space. Wall Controller sensor values are disabled and only Room Sensor used for setpoint control.
- Multiple Room Sensor values from multiple coolers can be averaged together to provide overall temperature and relative humidity values for larger spaces.



DUCT TEMPERATURE & RELATIVE HUMIDITY SENSOR

Temperature Range
+32...+122°F

Relative Humidity Range
0...100% r.h.

IP54

Probe length inside duct min.
3.5", max 6"

- Can be used by Building Management Systems (Low Voltage, Modbus or BACnet) to monitor cooler supply air conditions.



AMBIENT TEMPERATURE & RELATIVE HUMIDITY SENSOR

Temperature Range
-40...+158°F

Relative Humidity Range
0...100% r.h.

Radiation Shield
IP65

When used in conjunction with the Multi-Magic® Wall Controller:

- Ambient Condition Monitoring mode uses advanced formulas to calculate a predicted supply temperature. Coolers are disabled if the predicted supply temperature is greater than the current room temperature.
- Particularly suitable for applications which require room temperatures less than 68°F.



DIFFERENTIAL PRESSURE SENSOR

Pressure Range
0...+2.00 inwg.

IP66

LCD Display

Includes Static Pressure Tip
4" insertion depth.

- Can be used by Building Management Systems (Low Voltage, Modbus or BACnet) to monitor pressure drops.

